Exhaust Arm - Art. No.:79 002

» Flexible operation
» Up to 4 m reach

Technical Data

Art. No	79 002
Basic data	
Weight	17 kg
Additional information	
Exhaust arm type	flexible exhaust arm
Length of exhaust arm	2 m
Joints	1

Applications

» For connection to fans or central extraction systems
» High levels of smoke and dust
» Non-stop operation
» Welding fumes, gases, vapours, light dusts, car exhaust fumes

Benefits

» Fast operation due to particularly flexible adjustment
» 40% less adjustment of the exhaust arm needed due to exhaust hood design
» User-friendly due to particularly smooth movement of the hood with one hand
» Arm keeps position due to self-supporting design
» Due to its easy movement, the exhaust arm can be brought into any permanent position with one hand
» Various options to connect the exhaust arms to fans, stationary devices or via duct work to central extraction and filtration systems

Properties

» 360 degrees rotating exhaust hood with damper
» Self-supported by internal springs
» Exhaust arms up to 4 m

Scope of supply

» Exhaust arm with hood
» Wall bracket

Pressure loss

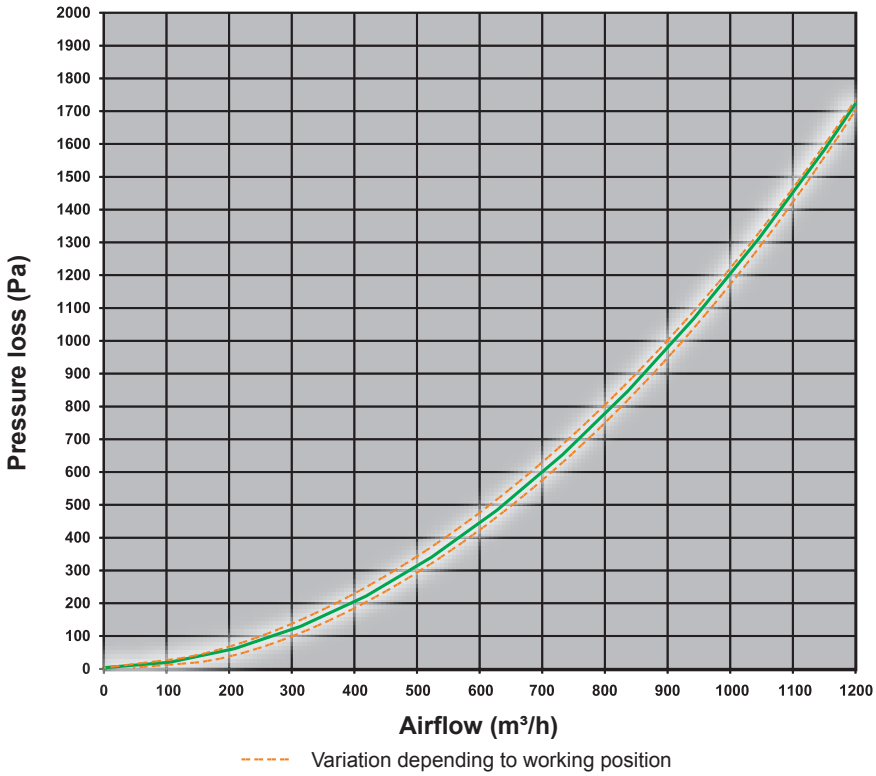
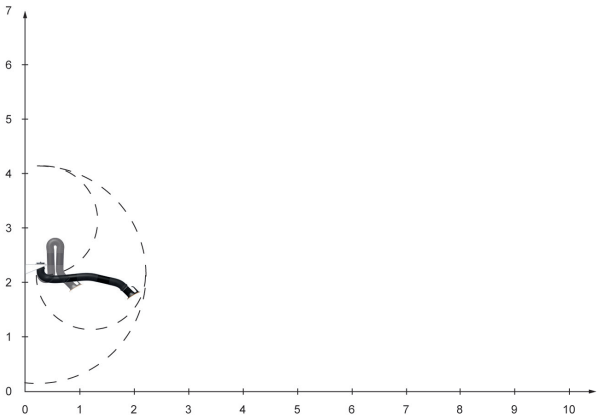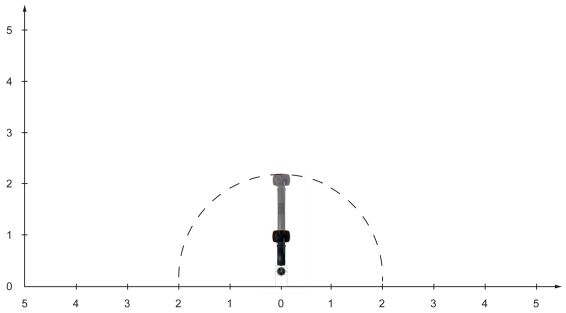
Dimensions