MaxiFil stationary - Art. No.:65 850 100

» High filter capacity
» Safe filter change

Applications

» Also suitable for high-alloy steel
» Medium levels of smoke and dust
» Regular use

Benefits

» Safe operation by rotation field control
» Exhaust arm requires less adjustment due to exhaust hood design
» Increased safety due to filter monitoring
» Increased safety with safe filter change
» Very economic due to long lasting high capacity filters

Properties

» 360 degrees rotating exhaust hood with damper
» Automatic Start/Stop (optional)
» Lighting in the hood (optional)
» Arm up to 10 m (with boom)
» Silencer
» Control box

Accessories

» Automatic Start/Stop
» Workplace lighting incl. on/off switch at the hood

Technical Data

Art. No	**65 850 100**
Filter	
Filter stages	2
Filter method	Disposable filter
Filter surface	ca. 42 m^2
Type of filter	SafeChangeFilter
Filter material	Non-woven polyester
Filter efficiency	> 99.5 %
Filterclass	E12
Additional filters	Pre-filter
Basic data	
Extraction capacity	1,000 m^3/h
Weight	125 kg
Motor power	1.5 kW
Power supply	3 x 400 V / 50 Hz
Rated current	3.1 A
Control voltage	24 V, DC
Noise level	72 dB(A)

Additional information	
IFA-Certification	Certification submitted
Fan type	Radial fan
Quantity of extraction arms	1
Exhaust arm type	flexible exhaust arm
Diameter extraction arm	150 mm
Length of exhaust arm	2 m

Suitable for alveole exchangeable dusts
separation > 99 % of particles < 0,4 µm

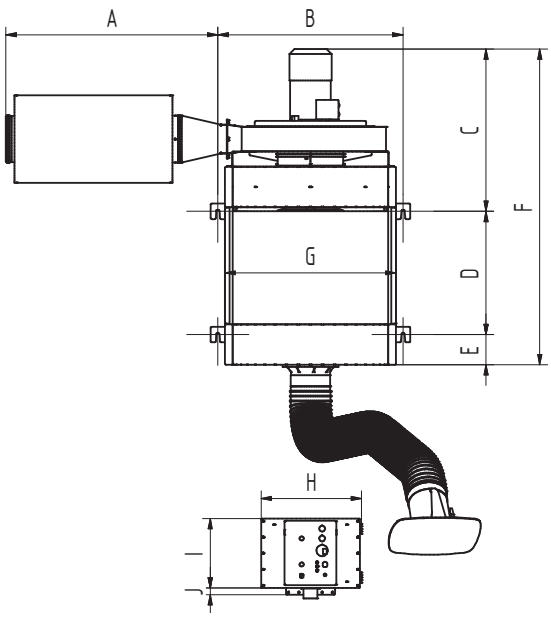

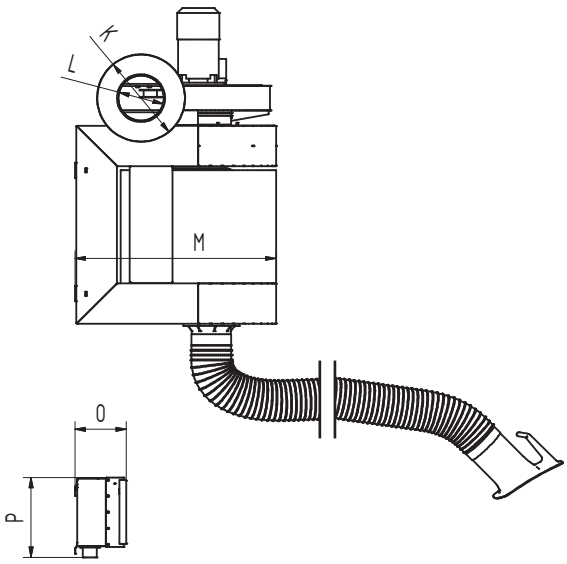

Technical Data
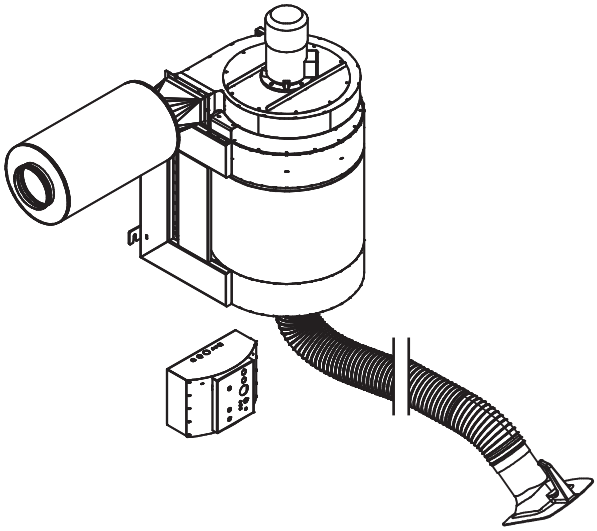
Dimensions	
A	818 mm
B	715 mm
C	631.5 mm
D	479 mm
E	118 mm
F	1,228 mm
G	660 mm
H	388 mm
I	270 mm
J	26 mm
K	340 mm
L	NW180 mm
M	776 mm
O	198.5 mm
P	310 mm