

ROUSSAKIS

s u p p l i e s

70 years of activity in the industrial field - Binzel Award



Snapshot from the BINZEL award

From the left can be seen Mr. Michalis Roussakis and his son Athanasios Roussakis

The companies **ROUSSAKIS SUPPLIES & ROUSSAKIS GASSES** have 70 years of activity in the industrial area with the aim of safety, quality and better customer service.

The **ROUSSAKIS GASSES** company has the ability to dispose of all Industrial Medical Gases and Special Mixtures in gaseous or liquid form, with same-day delivery, with company vehicles.

The **ROUSSAKIS SUPPLIES** company operates in the field of Industrial Marine Equipment and PPE equipment,

representing some of the leading companies in their field: **BINZEL - EWM - WELDAS - OPTREL - SFE - IBEDA - ZINSER - VULKAN - TOYO - EUROBOOR**, etc., with almost complete stock of products available..

On the occasion of this publication the **ROUSSAKIS SUPPLIES** would like to share with you and thank you that with your trust in the products of **Abicor Binzel**, the world's largest manufacturer of tweezers for MIG-TIG-PLASMA-ROBOT, won the **following awards**:

- **Marketing Activities** Award (for the promotion of its products).
- **Top Product Portfolio** Award (for the variety - availability of Binzel products).

Thank you for your trust and we promise to continue the same dynamic!

ROUSSAKIS SUPPLIES & ROUSSAKIS GASSES COMPANIES





- ✓ With over 70 years of experience in the industrial space, our goal remains safety, quality and your best service.
- ✓ In the field of Industrial equipment, our products are from the best houses in the world market & are certified according to the strict quality rules imposed by the European Union.
- ✓ We also undertake the study, installation and maintenance of networks, industrial gases, natural gas and LPG.

In our new fully equipped site you will find:

- Industrial gases
- Medical gases
- Metal cutting & welding materials
- TIG-MIG-PLASMA machines
- Protective equipment for workers
- Industrial equipment
- MIG-TIG-PLASMA welding service & tools, air & compressor.





✓ AUTHORIZED SERVICE

Our department is authorized to repair BDS, EWM machines and ABICOR BINZEL welding equipment. We also repair tools of all famous brands, such as METABO, MAKITA, MILWAUKEE, BOSCH, etc. and all air tools and compressors. All tools, after repair, reach you in excellent condition, whether they are within the warranty period or not.

✓ DATABASE RECORDING

Each machine or tool is recorded separately with a unique serial number in a database, during sale and repair so that we know its condition at all times.

✓ GENUINE SPARE PARTS

The spare parts used by our department are those specified by the manufacturer based on the blueprints and are genuine.

✓ COMPLETE SUPPORT

Based on our many years of experience, we can recommend the ideal machine or tool for each job. We also provide you with a same day repair cost estimate for your machine or tool. In the event that your machine tool cannot be repaired for any reason (unprofitable repair, discontinued model) you are entitled to an additional discount for the machine tool that we will recommend to you.



ΠΙΣΤΟΠΟΙΗΤΙΚΟ



Για το Σύστημα Διαχείρισης
σύμφωνα με το Πρότυπο
EN ISO 9001 : 2015

Τεκμηριώθηκε και βεβαιώνεται μέσω των Διαδικασιών της TÜV AUSTRIA, ότι η

ROUSSAKIS SUPPLIES IKE

**Γ. Παπανδρέου & Φαναριώτων
193 00 ΑΣΠΡΟΠΥΡΓΟΣ, ΕΛΛΑΔΑ**

Εφαρμόζει ένα Σύστημα Διαχείρισης για την Ποιότητα σε συμφωνία με το παραπάνω Πρότυπο για το ακόλουθο Πεδίο Εφαρμογής

ΕΜΠΟΡΙΑ ΒΙΟΜΗΧΑΝΙΚΟΥ ΚΑΙ ΝΑΥΤΙΛΙΑΚΟΥ ΕΞΟΠΛΙΣΜΟΥ.

Αριθ. Εγγραφής Πιστοποιητικού: 20001200004258

Ισχύει έως: 2023-12-13

Μαρία Αγαπητού
Διευθύντρια Πιστοποίησης Συστημάτων Διαχείρισης και Προϊόντων

Οργανισμός Πιστοποίησης
TÜV AUSTRIA

Αθήνα, 2020-12-14

Η παρούσα Πιστοποίηση πραγματοποιήθηκε σύμφωνα με την Διαδικασία Επιθεώρησης και Πιστοποίησης της TÜV AUSTRIA και επιτηρείται σε τακτά χρονικά διαστήματα.

TÜV AUSTRIA HELLAS
Λ. Μεσογείων 429
Τ.Κ. 153 43 Αθήνα, Ελλάδα
www.tuvaustriahellas.gr



CePRK478_A1

Headquarters in Athens bear the responsibility of the Certification decision

054990-19-1

BRANDS

OXYGEN TOOLS



WELDING - CONSUMABLES



PIPE CUTTING - FORMING - WELDING & AUTOMATION



POWER TOOLS - MAGNETIC DRILLS

 **EUROBOOR**
FOR PROFESSIONALS BY PROFESSIONALS

 **BDS**
MASCHINEN

 **Kamasdi**
PROFESSIONAL TOOLS

 **FLEX**
Das Original

 **metabo**

 **DEWALT**

 **Milwaukee**

 **Einhell**

 **BÜLLE**
MACHINERY - TOOLS

 **BOSCH**

 **MOSA**

 **FF.GROUP**
HIGH QUALITY TOOLS

 **BENMAN**

LIFTING EQUIPMENT - CLAMPS

 **TOYO**
LIFTING & HOIST

 **STF**

 **URKO**
THE FORCE OF INNOVATION

 **PIHER**

 **JAGUAR**

HAND TOOLS - CUTTING & GRINDING DISCS

 **FF.GROUP**
HIGH QUALITY TOOLS

 **BENMAN**

 **VIRAX**

 **STANLEY**

 **AMPCO**

 **FLEX**
Das Original

 **FACOM**

 **KNIPEX**

 **LENOX**

 **TOPTUL**

 **CAT**

 **Underwater Kinetics**

 **makita**

 **FORCE**

 **KS TOOLS**

 **fit**

 **Hilka**

 **ALMI**
SMART MACHINING

 **THIRARD**
FABRICANT DE SÉCURITÉ DEPUIS 1929

 **HUGO**
LOCKS

 **KDS**

 **INSIZE**

 **KLINGSPOR**

 **RHODIUS**

 **Drill Doctor**
The Drill Bit Sharpener

 **ÖZKAN**
MAKİNA VE EL ALETLERİ SANAYİ

 **Drill Doctor**
The Drill Bit Sharpener

 **SCANGRIP**
INNOVATION FROM DENMARK

 **GP**
GENERAL

 **PFERD**

ADR ITEMS - SIGNAGE - PARKING



PERSONAL PROTECTION EQUIPMENT



CLEANING EQUIPMENT - CHEMICALS - SILICONES - SPRAY



ROUSSAKIS

G A S S E S



**Industrial & Medical Gases - Gas Mixtures - Cylinders - Tanks - Liquid Gases - Propane,
High Purity Gases 99.999% - Dry Ice**





O₂ MEDICAL 2lt - 50lt



HELION 50lt high purity



OXYGEN - ACETYLENE 10lt



MEDICAL 2lt, 3lt, 4lt, 5lt, 10lt



PROPANE 500lt



For Stoves

25kg

15kg

13kg

10kg

5kg



Arrays O₂ - N₂



Bottle caps



Condenser

TABLE OF CONTENTS

Regulators for industrial gasses VULKAN Germany	12
Tools for industrial gasses LE LORRAIN France	14
Heat cutters for Pantograph - Welding tools.....	15
Regulators for Industrial Gases - Oxygen cutting GLOOR Swiss	16
Welding & cutting tools - GLOOR Swiss - Fuses WITT	17
Cutting Heating tubes with oxygen & for underwater cutting	18
Flame Arrestors - Safety valves IBEDA Germany.....	19
Accessories.....	20
Marine type Oxygen tools.....	21
Marine type EWM Welding machines.....	24
Cylinder carts.....	26
Pipe cutters - Circle Rails	28
Propane heaters - Accessories - Regulators.....	29
Regulators for propane cylinders - Accessories	30
Hoses for Industrial gasses - Italy.....	31
Welding Torches - BINZEL Germany.....	32
EWM Welding Machines	46
Welding equipment GYS.....	53
Plasma for metal cutting	54
ROBOT.....	55
Welding & Cutting Automation	56
Pipe fitting equipment TAG PIPE.....	58
TAG PIPE Welding Clamps	59
AXXAIR Pipe cutters - Welding.....	60
Pipe Welding OWT ORBITAL.....	61
Seals & welding purge TAG.....	62
Pipe stands TAG-PIPE.....	63
Carriage for pipe welding GULLCO.....	64
Pipe cutters - Bevel machines - EXACT discs.....	65
Welding tables DEMMELER Germany	66
Material - Consumables.....	67
Welding Equipment.....	70
Cables - Plugs - Glass	71
Wires - Electrodes - Rods - Rolls	72
Elctrodes.....	73
Fume Extraction Systems KEMPER Germany.....	74
Saw blades - Hole saws - Machinery	75
Magnetic drills.....	76
Grinding material.....	79
Carbide Rotary Burrs EUROBOOR	80
Cutting discs - Wirebrushes KLINGSPOR.....	82
Ratchet housing - Pipe cutters - Threading Machines VIRAX	83
Personal Protection Equipment.....	84
Welding helmets OPTREL.....	99
Foundry equipment	101
Safety Signboards.....	102
ADR equipment - Signboards	103
Power tools	104
Machinery & Lifting Equipment TOYO	108
Lifting magnets - Belts - Slings.....	109
Magnetic squares & clamps STRONG HAND TOOLS.....	110
Clamps PIHER	111
Pneumatic equipment UNIMAC.....	112
Hand tools.....	113
Non sparking hand tools	116
Cleaning equipment KARCHER - Detergents - Accessories	117
Cleaning equipment.....	118
Cleaning equipment - Garden equipment - Paint shop equipment.....	120
Toolboxes STABLEY - Protection net.....	122



209016 Regulator for acetylene cylinder 1.5bar

Vulkan



20800701 Regulator for oxygen cylinder 10bar



226702 Regulator for argon cylinder 200bar, 30lt with 2 flowmeters



226455 Regulator for argon cylinder 200bar, 30lt with flowmeter



203015 Regulator for N2 cylinder 10bar



203545 Cylinder regulator N2 40bar, 290m³



| High flow manometers for networks



| 2 steps regulator with manometers





CENTRAL PANELS



Oxygen | Acetylene | Argon | Nitrogen | Propane | Hydrogen



13

INDUSTRIAL GASSES NETWORKS



| 10 40022015 - Network manometer base

Vulkan



| 11 40021001 - Network manometer



e-shop

www.roussakis.com.gr

Roussakis



CASES - SET



202400- Oxygen Cutting Tool HP 1

For cutting up to 300mm



150375 - Argon Release Connectors



150341 - Acetylene Release Connectors



150340 -Oxygen Release Connectors



202850- Oxygen Cutting Tool HP 1 - 1m

For cutting up to 300mm



203400 Oxygen Cutting Tool HP 2 - 90°

For cutting up to 1000mm



Oxygen / Acetylene

CUTTING NOZZLES G1

Réf. G1	Réf. G1	Réf. IC	Réf. IC	Gaz	Gas	Calibre	Calibre	Epaisseur de coupe	Cutting thickness
205A07	206A07			Acétylène	Acetylene	7 / 10		3 à 10 mm	
205A10	206A10			Acétylène	Acetylene	10 / 10		10 à 25 mm	
205A12	206A12			Acétylène	Acetylene	12 / 10		25 à 50 mm	
205A16	206A16			Acétylène	Acetylene	16 / 10		50 à 80 mm	
205A20	206A20			Acétylène	Acetylene	20 / 10		80 à 120 mm	
205A25	206A25			Acétylène	Acetylene	25 / 10		120 à 200 mm	
205A30	206A30			Acétylène	Acetylene	30 / 10		200 à 300 mm	



Oxygen / Propane

Réf. G1	Réf. G1	Réf. IC	Réf. IC	Gaz	Gas	Calibre	Calibre	Epaisseur de coupe	Cutting thickness
200P07	206P07			Propane	Propane	7 / 10		3 à 10 mm	
200P10	206P10			Propane	Propane	10 / 10		10 à 25 mm	
200P12	206P12			Propane	Propane	12 / 10		25 à 50 mm	
200P16	206P16			Propane	Propane	16 / 10		50 à 80 mm	
200P20	206P20			Propane	Propane	20 / 10		80 à 120 mm	
200P25	206P25			Propane	Propane	25 / 10		120 à 200 mm	
200P30	206P30			Propane	Propane	30 / 10		200 à 300 mm	



Heating tool propane-oxygen HE-505 HARRIS type





PANTOGRAPH CUTTING TOOLS



230850

230401

230400



| 010200 - Welding tools TYPE SO



| 010500 - Welding tools TYPE S2



| 1000 - Oxygen cutting tools AM

MINI GASSES REGULATORS



| 050200 Mini Oxygen Regulator

| 051200 Mini Acetylene Regulator

| 054200 Mini Argon Regulator

| 054202 Regulator for argon cylinder with 2 flowmeters



| Collector Nitrogen - Wine

15

Roussakis



e-shop

www.roussakis.com.gr



5100 Manometer for oxygen, nitrogen, argon, helion etc.



5140 Manometer for oxygen, nitrogen, argon, helion etc.



7900 High flow manometer



5600 Network manometer

GLOOR



6200 Propane manometer



4701 Cutting tool CARANT
For cutting up to 300mm



Caliper Gloor with roller



Gas saver Gloor

4521-A Acetylene
4520 Propane



Cutting nozzles 13mm & 17mm

4421 Acetylene
4422 Propane



ANME **PNME**



GLOOR



3901 Oxygen tool handle 13mm



4501 Cutting tool 13mm
For cutting up to 60mm



4541 Straight Cutting tool 13mm
For cutting up to 60mm



3909 Welding torch 13mm
N° 1-6



3956 Heating torch 13mm
N° 4-6



3965 Welding torch 13mm
For Goldsmith

GLOOR CUTTING CASES



17mm



13mm



3601 Oxygen tool handle 17mm



4401 Cutting tool 17mm
For cutting up to 100mm



4301 Cutting tool 17mm
For cutting up to 300mm

17



3610-P Welding torch 17mm
N° 1-8



3660-A Heating torch 17mm
Acetylene N° 8-10-12



3660-P Heating torch 17mm
Propane N° 10-12-14



e-shop

www.roussakis.com.gr

ROUSSAKIS



Heating tube handle



18

Heating tube switch



Heating tube safety valve



Underwater cutting torch

BROCO BR-22 PLUS





High flow valves



Manometers valve
with restart switch

Heat cutter valves
3/8" | 1/4" | 9/16" | M16x1.5



Manometers valve
3/8" | 1/4" | 9/16" | M16x1.5



Valve with vacuum ATEX



In between valve





| Manometer clock



| Pipe clamps



| Splitter
3/8" | 1/4" | 9/16" | M16x1.5



| Gas preheater



| Gas transfusion



| Cylinder fullness control clock



| Nozzle cleaning needles



| Manometer protection covers



| MAPP-GAS bottle



| Heater MAPP-GAS

| PORTABLE GAS DETECTORS GAS CLIP



Multi Gas Clip



MGC Simple



MGC Simple Plus



Single Gas Clip



Single Gas Clip Plus



GCT External Pump

gas clip
technologies



MARINE TYPE - OXYGEN TOOLS

ROUSSAKIS
Supplies

SHANK 2601



**WELDING ATTACHMENT
3614**



**WELDING ATTACHMENT
3615**



**WELDING ATTACHMENT
3616**



**WELDING ATTACHMENT
3617**



**WELDING ATTACHMENT
3618**



**Oxygen-Propane (LPG)
Heating Attachment
3703**



**Oxygen-Propane (LPG)
Heating Attachment
3704**



**Nozzle mix type cutting torch
4430**



Nozzle Mix-Type Cutting Torch 4552



Pressure Regulator - Oxygen 5401S



Pressure Regulator - Acetylene 5411S



Pressure Regulator - Nitrogen 5431S



Pressure Regulator - Argon 5443S



Welding and Cutting Outfits with 8 Welding Attachments 8803



ACETYLENE HOSE
ALFAGOMMA 076AH
ISO 3821



OXYGEN HOSE
ALFAGOMMA 076AE
ISO 3821



TWIN HOSE OXYGEN -
ACETYLENE ALFAGOMMA
076EH ISO 3821



CUTTING NOZZLE -X31 ANME
ACETYLENE ATTC



DGN G3/8LH FUEL GAS
FLASHBACK ARRESTOR AC/PR



DGN G3/8RH OXYGEN
FLASHBACK ARRESTOR OX



DS2000 3/8 FLASHBACK
ARRESTOR



OXYGEN - G3/8RH
ACETYLENE - G3/8LH

Similar to S66

DS1000 3/8 FUEL GAS
FLASHBACK ARRESTOR



OXYGEN - UNF9/16RH
ACETYLENE - UNF9/16LH

Similar to S55

TT 6,3MM OXYGEN FLASH-
BACK ARRESTOR



TT 6,3MM AC/PR FLASHBACK
ARRESTOR



RELEASE CONNECTORS
ACETYLENE LE LORRAIN
150341



RELEASE CONNECTORS
OXYGEN LE LORRAIN
150340



e-shop

www.roussakis.com.gr

QUICK-ACTION COUPLING
WITH PUSH SYSTEM DKD



ACETYLENE/PROPANE
OXYGEN
3/8

QUICK-ACTION COUPLING
WITH PULL SYSTEM DKD-W



ACETYLENE/PROPANE
OXYGEN
3/8

QUICK-ACTION COUPLING
6.3mm DKT



ACETYLENE/PROPANE
OXYGEN

COUPLING PIN D1



ACETYLENE/PROPANE
OXYGEN
3/8

COUPLING PIN 6.3mm D2



ACETYLENE/PROPANE
OXYGEN





e-shop

www.roussakis.com.gr

Roussakis

Pico 220 cel puls
4m calebes with ground clamps & electrode holder



Version	Pico 180 puls
Setting range for welding current	5 A - 180 A
Duty cycle 40 °C	180 A / 25 %
	130 A / 50 %
	120 A / 100 %
Open circuit voltage	98 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	9.3 kVA
Protection classification	IP23
Test mark	
EMC class	A
Dimensions (L x B x H)	428 mm x 136 mm x 252 mm 16.9 inch x 5.4 inch x 9.9 inch
Weight	8.3 kg 18.3 lbs
Standards	IEC 60974-1 and -10 CL.A

Pico 160
4m calebes with ground clamps & electrode holder



Version	Pico 160
Setting range for welding current	10 A - 150 A
Duty cycle 40 °C	150 A / 35 %
	120 A / 60 %
	100 A / 100 %
Open circuit voltage	105 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	9.9 kVA
Protection classification	IP23
Test mark	
EMC class	A
Dimensions (L x B x H)	370 mm x 129 mm x 236 mm 14.6 inch x 5.1 inch x 9.3 inch
Weight	4.9 kg 10.8 lbs
Standards	IEC 60974-1 and -10 CL.A

Pico 162 MV
4m calebes with ground clamps & electrode holder



Version	Input voltage: 230 V Input voltage: 115 V
Setting range for welding current @ 230 V	10 A - 150 A
Setting range for welding current @ 115 V	10 A - 150 A
Duty cycle 40 °C @ 230 V	150 A / 35 %
	120 A / 60 %
	100 A / 100 %
Duty cycle 40 °C @ 115 V	110 A / 35 %
	90 A / 60 %
	80 A / 100 %
Open circuit voltage	105 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	8.6 kVA @ 230 V / 6 kVA @ 115 V
Protection classification	IP23
Test mark	
EMC class	A
Weight	5.4 kg



Pico 160 cel puls
4m cables with ground clamps & electrode holder



Version	Pico 160 cel puls
Setting range for welding current	5 A - 150 A
Duty cycle 40 °C	150 A / 30 %
	120 A / 60 %
	110 A / 100 %
Open circuit voltage	94 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	9.9 kVA
Protection classification	IP23
Test mark	CE UK CA EAC S A
EMC class	
Dimensions (L x B x H)	370 mm x 129 mm x 236 mm 14.6 inch x 5.1 inch x 9.3 inch
Weight	4.9 kg 10.8 lbs
Standards	IEC 60974-1 and -10 CL.A

Pico 180 puls
4m cables with ground clamps & electrode holder



Version	Pico 180 puls
Setting range for welding current	5 A - 180 A
Duty cycle 40 °C	180 A / 25 %
	130 A / 60 %
	120 A / 100 %
Open circuit voltage	98 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	9.3 kVA
Protection classification	IP23
Test mark	CE UK CA EAC S A
EMC class	
Dimensions (L x B x H)	428 mm x 136 mm x 252 mm 16.9 inch x 5.4 inch x 9.9 inch
Weight	8.3 kg 18.3 lbs
Standards	IEC 60974-1 and -10 CL.A



27

ROUSSAKIS
s u p p l i e s



e-shop

www.roussakis.com.gr

ROUSSAKIS

Cylinder carts



Single bottle cart
EWM F1



Germany type cart
with solid wheels Ø300



Single bottle cart
10-20lt



Cart for welding
machine & cylinder



Propane Double
Cart & fire
extinguisher seat

Cart for oxygen &
acetylene cylinders
with CE

Double cart for
oxygen - propane cylinders



Propane Double
Cart & fire
extinguisher seat



Aluminum splitted cart
90kg



Deep garden cart
with tracked wheel





Cart for mini cylinders
oxygen - acetylene



Cart for cylinders
oxygen - acetylene



Oxygen - Propane Cart
15Kg CE 3 wheels & crane



Single cylinder cart



Oxygen - Propane Cart
with slots for crane

29



Beton cart



e-shop

www.roussakis.com.gr

ROUSSAKIS


Pipe cutters - Circle Rails



Oxygen pipe cutter
manual



Oxygen pipe cutter
electrical

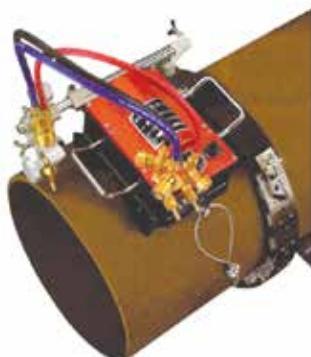

Oxygen pipe cutter
magnetic



Oxygen cutting circle rail
with 2 heads & rail



Welding circle rail
magnetic GULLCO



Automation welding circle rail
GULLCO KAT



Portable circle rail FAVORIT I & II



Manual pipe cutter
RSV-4 (400-1600mm) | RSV4/14



Electrical pipe cutter
RSV-1 with electric guide



Manual pipe cutter
RSV-0|1|2|3



Portable cutter CNC Plasma
FAVORIT V-CNC





Propane regulator
high pressure COMAP



Propane regulator
high pressure



Propane heater handle
with trigger



Propane heater handle
without trigger



Welding heater
type "axe"



Tube heater



Propane heater bases
2,3,4 heads



Propane heaters



Propane heater torches
20cm - 1m



e-shop

www.roussakis.com.gr



Propane cylinder regulator
high pressure 12kg



Propane cylinder regulator
low pressure 0-7.5bar
30-60mbar



Propane cylinder regulator
low pressure 30mbar



Propane cylinder regulator
0-3bar TYPE 902 - 40kg



Propane cylinder regulator
high pressure 0-4bar / 12kg



Wrench for gas cylinder



Oxygen lighter - gun

ACCESSORIES

32



Cylinder collector

Collector

Flexible connecting pipes




ALFAGOMMA


076A Oxygen - Oxygen welding 20 bar (300psi)

EN ISO 3821



076AH Acetylene - Acetylene welding 20 bar (300 psi)

EN ISO 3821



076AI Propane - LPG welding 20 bar (300 psi)

EN ISO 3821



076EH Oxygen - Acetylene double

Oxygen/acetylene twin welding 20 bar (300 psi)

EN ISO 3821



076EI Oxygen - Propane double

Oxygen/LPG twin welding 20 bar (300 psi)

EN ISO 3821



076AA006013 Argon hose 6mm

**e-shop****Tube:** black SBR.**Reinforcement:** high tensile textile cords.**Cover:** blue SBR/EPDM - abrasion and ozone resistant.**Application:** oxygen welding.**Constant operation:** -25 °C +80 °C (-13 °F +176 °F)**Tube:** black SBR.**Reinforcement:** high tensile textile cords.**Cover:** red SBR/EPDM - abrasion and ozone resistant.**Application:** acetylene welding.**Constant operation:** -25 °C +80 °C (-13 °F +176 °F)**Tube:** black NBR.**Reinforcement:** high tensile textile cords.**Cover:** orange SBR/EPDM - abrasion and ozone resistant.**Application:** oxygen welding.**Constant operation:** -30 °C +80 °C (-22 °F +176 °F)**Tube:** black SBR.**Reinforcement:** high tensile textile cords.**Cover:** blue, red SBR/EPDM - abrasion and ozone resistant.**Application:** oxygen/acetylene twin welding.**Constant operation:** -25 °C +80 °C (-13 °F +176 °F)**Tube:** black SBR.**Reinforcement:** high tensile textile cords.**Cover:** blue, orange SBR/EPDM - abrasion and ozone resistant.**Application:** oxygen/LPG twin welding.**Constant operation:** -30 °C +80 °C (-13 °F +176 °F)

185AX Air hose



492000X Crystal hose for food



MB EVO PRO 15

Technical data (EN 60 974-7):

Rating: 180 A CO₂
150 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 0.6–1.0 mm

MB EVO PRO 25


Technical data (EN 60 974-7):

Rating: 230 A CO₂
200 A mixed gas
M21 (DIN EN ISO 14175)


Duty cycle: 60%

Wire size: 0.8–1.2 mm

MB EVO PRO 15





MB EVO PRO 25



Gas nozzle (10 pcs.)

	Ø A		Ø B	
Cylindrical	Ø 16	145.0041	Ø 18	145.0042
Conical	Ø 12	145.0075 ¹	Ø 15	145.0076 ²
Tapered	Ø 9.5	145.0123	Ø 11.5	145.0124



Contact tip (10 pcs.)


	M6	M6
E-Cu	Ø 0.6	140.0008
	Ø 0.8	140.0059
	Ø 1.0	140.0253
	Ø 1.2	-
E-Cu for Al	Ø 0.8	141.0002
	Ø 1.0	141.0007
	Ø 1.2	-
CuCrZr	Ø 0.6	140.0855
	Ø 0.8	140.0062 ¹
	Ø 1.0	140.0256
	Ø 1.2	-

Nozzle spring (100 pcs.)

	002.0058 ¹	003.0013 ²
--	-----------------------	-----------------------

Gas nozzle holder (1 pc.) / Contact tip holder (10 pcs.)

M6	002.0078 ¹	142.0001 ²	142.0267.10
----	-----------------------	-----------------------	-------------



Liner	for 3 m	for 4 m	for 5 m
Liner	Ø 0.6 124.0011	124.0012	124.0015
	Ø 0.8 124.0011 ¹	124.0012 ¹	124.0015 ¹
	Ø 1.0 124.0026 ²	124.0031 ²	124.0035 ²
	Ø 1.2 124.0026	124.0031	124.0035
PTFE liner	Ø 0.6 126.0005	126.0008	126.0011
	Ø 0.8 126.0005	126.0008	126.0011
	Ø 1.0 126.0021	126.0026	126.0028
	Ø 1.2 126.0021	126.0026	126.0028
Carbon	Ø 0.6 127.0002	127.0003	127.0004
PTFE liner	Ø 0.8 127.0002	127.0003	127.0004
	Ø 1.0 127.0005	127.0007	127.0008
	Ø 1.2 127.0005	127.0007	127.0008





MB EVO PRO 24

Technical data (EN 60 974-7):

Rating: 250 A CO₂
220 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 0.8-1.2 mm

MB EVO PRO 26

Technical data (EN 60 974-7):

Rating: 270 A CO₂
240 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 0.8-1.2 mm

MB EVO PRO 36

Technical data (EN 60 974-7):

Rating: 320 A CO₂
290 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 0.8-1.2 mm



Gas nozzle (10 pcs.)

	Ø A	Ø B	Ø C	
Cylindrical	Ø 17	145.0047	Ø 20	145.0051
Conical	Ø 12.5	145.0080 ¹	Ø 16	145.0085 ²
Tapered	Ø 10	145.0128	Ø 14	145.0132

Contact tip (10 pcs.)

	M6	M6	M8	M6	M8
E-Cu	Ø 0.8	140.0051	140.0051	140.0114	140.0051
	Ø 1.0	140.0242	140.0242	140.0313	140.0313
	Ø 1.2	140.0379	140.0379	140.0442	140.0442
E-Cu for Al	Ø 0.8	141.0001	141.0001	141.0003	141.0001
	Ø 1.0	141.0006	141.0006	141.0008	141.0008
	Ø 1.2	141.0010	141.0010	141.0015	141.0015
CuCrZr	Ø 0.8	140.0054	140.0054	140.0117	140.0054
	Ø 1.0	140.0245 ¹	140.0245 ²	140.0316	140.0316
	Ø 1.2	140.0382	140.0382	140.0445	140.0382

Contact tip holder (10 pcs.)

M6	142.0003 ¹	142.0007 ²	142.0005
M8	-	142.0082	142.0020 ²

Gas diffuser (10 pcs.)

Standard	012.0183 ¹	018.0116 ¹	014.0261 ¹
Long life	-	-	014.0026
Ceramic	-	018.0141	014.0023

Liner	for 3 m	for 4 m	for 5 m
Liner	Ø 0.8	124.0011	124.0012
	Ø 1.0	124.0026 ^{1,2}	124.0031 ^{1,2}
	Ø 1.2	124.0026 ¹	124.0031 ¹
PTFE liner	Ø 0.8	126.0005	126.0008
	Ø 1.0	126.0021	126.0026
	Ø 1.2	126.0021	126.0026
Carbon	Ø 0.8	127.0002	127.0003
PTFE liner	Ø 1.0	127.0005	127.0007
	Ø 1.2	127.0005	127.0008





MB EVO PRO 240 D

Technical data (EN 60 974-7):

Rating: 325 A CO₂
300 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 100%

Wire size: 0.8-1.2 mm

MB EVO PRO 401 D / 501 D

Technical data (EN 60 974-7):

Rating: 450 A / 475 A CO₂
400 A / 425 A mixed gas
M21 (DIN EN ISO 14175)


Duty cycle: 100%

Wire size: 0.8-1.2 mm


MB EVO PRO 240 D



MB EVO PRO 401 D / 501 D



MB EVO PRO 401 / 501



Gas nozzle (10 pcs.)

	Ø A	Ø B	Ø C	
Cylindrical	Ø 17	145.0047	Ø 20	145.0051
Conical	Ø 12.5	145.0080 ¹	Ø 16	145.0085 ²
Tapered	Ø 10	145.0128	Ø 14	145.0132

Contact tip (10 pcs.)

	M6	M6	M8	M6	M8
E-Cu	Ø 0.8	140.0051	140.0051	140.0114	140.0051
	Ø 1.0	140.0242	140.0242	140.0313	140.0242
	Ø 1.2	140.0379	140.0379	140.0442	140.0442
	Ø 1.6	-	140.0555	140.0587	140.0555
E-Cu for Al	Ø 0.8	141.0001	141.0001	141.0003	141.0001
	Ø 1.0	141.0006	141.0006	141.0008	141.0006
	Ø 1.2	141.0010	141.0010	141.0015	141.0010
	Ø 1.6	-	141.0020	141.0022	141.0020
CuCrZr	Ø 0.8	140.0054	140.0054	140.0117	140.0054
	Ø 1.0	140.0245 ¹	140.0245	140.0316	140.0245
	Ø 1.2	140.0382	140.0382	140.0445 ²	140.0382
	Ø 1.6	-	140.0558	140.0590	140.0558

Contact tip holder (10 pcs.)

	M6	M6	M8	M8
M6	142.0003 ¹	142.0008	-	-
M8	-	142.0022	142.0201.10 ²	-

Gas diffuser (10 pcs.)

	Standard	012.0183 ¹	030.0145 ²	030.0145 ³
Long life	-	030.0037	030.0037	030.0037
Ceramic	-	030.0190	030.0190	030.0190

Liner

	for 3 m	for 4 m	for 5 m
Liner	Ø 0.8	124.0137	124.0138
	Ø 1.0	124.0111 ¹	124.0112 ¹
	Ø 1.2	124.0111 ^{2,3}	124.0112 ^{2,3}
	Ø 1.6	124.0114	124.0115
PTFE liner	Ø 0.8	126.0005	126.0008
	Ø 1.0	126.0021	126.0026
	Ø 1.2	126.0021	126.0026
	Ø 1.6	126.0039	126.0042
Carbon	Ø 0.8	127.0002	127.0003
PTFE liner	Ø 1.0	127.0005	127.0007
	Ø 1.2	127.0005	127.0007
	Ø 1.6	127.0010	127.0012





ABIMIG® A T 155 LW

Technical data (EN 60 974-7):

Rating: 190 A CO₂
180 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 0.8–1.0 mm

ABIMIG® A T 255 LW

Technical data (EN 60 974-7):

Rating: 240 A CO₂
220 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 0.8–1.2 mm

ABIMIG® A T 305 LW

Technical data (EN 60 974-7):

Rating: 290 A CO₂
260 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 0.8–1.2 mm




Gas nozzle (5 pcs.)

Cylindrical	Ø A	X1	
Conical	Ø 18	72 mm	145.D021 ¹
Conical	Ø 16	69 mm	145.D022



Contact tip (10 pcs.)

E-Cu	Ø 0.8	Ø 1.0	Ø 1.2	M8
	140.0114	140.0313	140.0442	
E-Cu for Al	Ø 0.8	Ø 1.0	Ø 1.2	141.0003
	141.0008	141.0015		
CuCrZr	Ø 0.8	Ø 1.0	Ø 1.2	140.0117
	140.0316	140.0445 ¹		



Contact tip holder (5 pcs.)

M8	014.D745.5 ¹



Adapter piece (5 pcs.)

767.D668.5¹



Torch neck liner for T-torches

Standard	Ø 0.8	Ø 1.0-1.2	122.D037
	122.D038 ¹		
Brass for Al	Ø 1.0		122.D040
	Ø 1.0-1.2		122.D041

Liner	for 3 m	for 4 m	for 5 m	
Liner	0.8 1.0 1.2	124.0011 124.0026 124.0026 ¹	124.0012 124.0031 124.0031 ¹	124.0015 124.0035 124.0035 ¹
PTFE liner	0.8 1.0 1.2	126.0005 126.0021 126.0021	126.0008 126.0026 126.0026	126.0011 126.0028 126.0028
Carbon	0.8	127.0002	127.0003	127.0004
PTFE liner	1.0 1.2	127.0005 127.0007	127.0007	127.0008 127.0008

ABIMIG® A T 405 LW

Technical data (EN 60 974-7):

Rating: 400 A CO₂
370 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 1.0–1.6 mm





ABIMIG® A 155 LW

Technical data (EN 60 974-7):

Rating: 170 A CO₂
170 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 0.8–1.0 mm

ABIMIG® A 255 LW

Technical data (EN 60 974-7):

Rating: 230 A CO₂
220 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 0.8–1.2 mm

Gas nozzle (5 pcs.)	ABIMIG® A 155 LW			ABIMIG® A 255 LW		
	Ø A	X1	Ø B	X2	Ø 20	Ø 22
Cylindrical	Ø 17	52 mm	Ø 18	69 mm	145.D003	145.D014
Conical	Ø 12	52 mm	Ø 16	70 mm	145.D001 ¹	145.D011 ²
Conical	Ø 12	54 mm	Ø 14	67 mm	145.D004	145.D012

Contact tip (10 pcs.)	Ø 0.8			Ø 1.0		
	M6	25 mm	M6	28 mm	M6	35 mm
E-Cu	Ø 0.8	140.0059 ¹	Ø 1.0	140.0253	Ø 1.2	-
E-Cu for Al	Ø 0.8	141.0002	Ø 1.0	141.0007	Ø 1.2	-
CuCrZr	Ø 0.8	140.0062	Ø 1.0	140.0256	Ø 1.2	-

Contact tip holder (5 pcs.)	Ø 0.8		Ø 1.0	
	M6	35 mm	M6	51 mm
		006.D719.5 ¹		004.D624.5 ²

Adapter piece (5 pcs.)	Ø 0.8		Ø 1.0	
	M6	767.0107.5 ¹	M6	767.0637.5 ²

Liner	for 3 m		for 4 m		for 5 m	
	Ø 0.8	124.0011 ¹	Ø 1.0	124.0026 ²	Ø 1.2	124.0026
Liner	Ø 0.8	124.0011 ¹	Ø 1.0	124.0026 ²	Ø 1.2	124.0026
PTFE liner	Ø 0.8	126.0005	Ø 1.0	126.0021	Ø 1.2	126.0021
Carbon	Ø 0.8	127.0002	Ø 1.0	127.0005	Ø 1.2	127.0005
PTFE liner	Ø 0.8	127.0003	Ø 1.0	127.0007	Ø 1.2	127.0007





ABIMIG® A 350 LW

Technical data (EN 60 974-7):

Rating: 280 A CO₂
260 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 0.8–1.2 mm

ABIMIG® A 355 LW

Technical data (EN 60 974-7):

Rating: 330 A CO₂
310 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 1.0–1.6 mm

ABIMIG® A 405 LW

Technical data (EN 60 974-7):

Rating: 400 A CO₂
350 A mixed gas
M21 (DIN EN ISO 14175)

Duty cycle: 60%

Wire size: 1.0–1.6 mm

Gas nozzle (5 pcs.)			ABIMIG® A 305 / 355 LW	ABIMIG® A 405 LW		
Cylindrical	Ø 21	71 mm	145.D024	Ø 21	71 mm	145.D024
Conical	Ø 18	72 mm	145.D021 ^{1,2}	Ø 18	72 mm	145.D021 ²
Conical	Ø 16	69 mm	145.D022	Ø 16	69 mm	145.D022

Contact tip (10 pcs.)		
E-Cu	Ø 0.8	140.0114
E-Cu	Ø 1.0	140.0313
E-Cu	Ø 1.2	140.0442
E-Cu	Ø 1.6	140.0587
E-Cu for Al	Ø 0.8	141.0003
E-Cu for Al	Ø 1.0	141.0008
E-Cu for Al	Ø 1.2	141.0015
E-Cu for Al	Ø 1.6	141.0022
CuCrZr	Ø 0.8	140.0117
CuCrZr	Ø 1.0	140.0316
CuCrZr	Ø 1.2	140.0445 ^{1,2}
CuCrZr	Ø 1.6	140.0590

Contact tip holder (5 pcs.)		
M8	014.D745.5 ^{1,2}	014.D745.5 ¹

Adapter piece (5 pcs.)		
	767.D668.5 ^{1,2}	015.D080.5 ¹

Liner	305 / 355 for 3 m	405 for 3 m	305 / 355 for 4 m	405 for 4 m	305 / 355 for 5 m	405 for 5 m
Liner	0.8 124.0011	- 124.0012	- 124.0014	- 124.0015	- 124.0115	- 124.0115
Liner	1.0 124.0026	124.D113 124.0031	124.D114 124.0035	124.D114 124.0035 ^{1,2}	124.D115 124.D115	124.D115 124.D115
Liner	1.2 124.0026 ^{1,2}	124.D113 124.0031 ^{1,2}	124.D114 124.0035 ^{1,2}	124.D114 124.0035 ^{1,2}	124.D115 124.D115	124.D115 124.D115
Liner	1.6 124.0041	124.D116 ¹	124.0042 124.D117 ¹	124.0044 124.D117 ¹	124.0044 124.D118 ¹	124.0044 124.D118 ¹
PTFE liner	0.8 126.0005	- 126.0008	- 126.0011	- 126.0011	- 126.0028	- 126.0028
PTFE liner	1.0 126.0021	- 126.0026	- 126.0028	- 126.0028	- 126.0045	- 126.0045
PTFE liner	1.2 126.0021	- 126.0026	- 126.0042	- 126.0042	- 126.0045	- 126.0045
PTFE liner	1.6 126.0039	- 126.0042	- 126.0045	- 126.0045	- 126.0045	- 126.0045
Carbon PTFE liner	0.8 127.0002	- 127.0003	- 127.0004	- 127.0004	- 127.0008	- 127.0008
Carbon PTFE liner	1.0 127.0005	- 127.0007	- 127.0008	- 127.0008	- 127.0013	- 127.0013
Carbon PTFE liner	1.2 127.0005	- 127.0007	- 127.0012	- 127.0012	- 127.0013	- 127.0013
Carbon PTFE liner	1.6 127.0010	- 127.0012	- 127.0013	- 127.0013	- 127.0013	- 127.0013





ABITIG® GRIP 17
Technical data (EN 60 974-7):

Type of cooling: air cooled
Rating: 140 A DC
100 A DC
Duty cycle: 35%
Tungsten electrodes: Ø 0.5-2.4 mm

ABITIG® GRIP 18
Technical data (EN 60 974-7):

Type of cooling: liquid cooled
Rating: 320 A DC
230 A DC
Duty cycle: 100%
Tungsten electrodes: Ø 0.5-4.0 mm

ABITIG® GRIP 26
Technical data (EN 60 974-7):

Type of cooling: air cooled
Rating: 180 A DC
130 A DC
Duty cycle: 25%
Tungsten electrodes: Ø 0.5-4.0 mm

Beck cap (10 pcs)	Short 712.1053	Long 712.1051
-------------------	-------------------	------------------

Collet (10 pcs)	Version [50 mm]	Version [52 mm]
Ø 0.5 mm	702.0005 / 10N21	701.0169 / 10N21D
Ø 1.0 mm	702.0006 / 10N22	701.0171 / 10N22D
Ø 1.2 mm	702.0007 / -	701.0170 / -
Ø 1.6 mm	702.0008 / 10N23	701.0172 / 10N23D
Ø 2.0 mm	702.0012 / -	701.0176 / -
Ø 2.4 mm	702.0009 / 10N24	701.0173 / 10N24D
Ø 3.2 mm	702.0010 / 10N25	701.0174 / 10N25D
Ø 4.0 mm	702.0011 / 54N20	701.0175 / 54N20

Insulating ring / Adaptor	Insulating ring (10 pcs) 703.0012 / 18CG	Adaptor (10 pcs) 701.0130 / 54N01	Adaptor (5 pcs) 701.1122 / 54N63
---------------------------	---	--------------------------------------	-------------------------------------

Collet body	Standard version (10 pcs)	Standard version with gas lens (10 pcs)	Jumbo version with gas lens (5 pcs)
Ø 0.5-1.2 mm	701.0190 / 10N30	701.0201 / 45V24	-
Ø 1.6 mm	701.0191 / 10N31	701.0203 / 45V25	-
Ø 2.0 mm	701.0196 / 10N32	701.0207 / 45V26	-
Ø 2.4 mm	701.0197 / 10N32	701.0207 / 45V26	701.1116 / 45V16
Ø 3.2 mm	701.0197 / 10N28	701.0209 / 45V27	701.1117 / 45V64
Ø 4.0 mm	701.0198 / 40648B	701.0211 / 45V28	701.1118 / 995295

Gas nozzle, ceramic (10 pcs)	Standard version	Standard version for gas lens	Jumbo version for gas lens
---------------------------------	------------------	----------------------------------	-------------------------------

No. 4 Ø 6.5 mm	701.0107 / 10N50	701.0420 / 54N18	-
No. 5 Ø 8.0 mm	701.0108 / 10N49	701.0421 / 54N17	-
No. 6 Ø 9.5 mm	701.0109 / 10N48	701.0422 / 54N16	701.1199 / 57N75
No. 7 Ø 11.0 mm	701.0110 / 10N47	701.0423 / 54N15	-
No. 8 Ø 12.5 mm	701.0111 / 10N46	701.0424 / 54N14	701.1200 / 57N74
No. 10 Ø 16.0 mm	701.0113 / 10N45	701.0426 / 54N19	701.1201 / 53N68
No. 12 Ø 19.5 mm	701.0114 / 10N44 ¹	-	701.1121 / 53N67

Gas nozzle, ceramic (10 pcs)	Standard version	Standard version for gas lens	Jumbo version for gas lens ²
---------------------------------	------------------	----------------------------------	--

No. 5 Ø 8.0 mm	701.0115 / 10N49L	701.0427 / 54N17L	-
No. 6 Ø 9.5 mm	701.0116 / 10N48L	701.0428 / 54N16L	-
No. 7 Ø 11.0 mm	701.0117 / 10N47L	701.0429 / 54N15L	-
Ø 24.0 mm	-	-	701.1202 / 53N69

**ABICOR
BINZEL**





ABITIG® GRIP 150 & F Technical data (EN 60 974-7):

Type of cooling:	air cooled
Rating:	150 A DC 105 A DC
Duty cycle:	35%
Tungsten electrodes:	Ø 1.0–2.4 mm

ABITIG® GRIP 260 W & SC Technical data (EN 60 974-7):

Type of cooling:	liquid cooled
Rating:	260 A DC 185 A DC
Duty cycle:	100%
Tungsten electrodes:	Ø 1.0–3.2 mm

Back cap (10 pcs.)	Short	Medium	Long
	776.0053	771.0051	772.0051.10

Electrode holder / Gas diffuser (5 pcs.)	Electrode holder	Gas diffuser	Gas diffuser	Gas diffuser
Ø 1.0 mm	776.0061	776.0171	777.0171.5	776.0171
Ø 1.6 mm	776.0062	776.0172	777.0172.5	776.0172
Ø 2.0 mm	776.0067	776.0177	777.0177.5	776.0177
Ø 2.4 mm	776.0063	776.0173	777.0173.5	776.0173
Ø 3.2 mm	776.0064	776.0174	777.0174.5	776.0174

Insulator Adaptor ring	Standard version (10 pcs.)	for gas diffuser (1 pc.)
	776.1043	776.0443 776.0441

Gas diffuser 4 (1 pc.)	Standard	Multilayer
Ø 1.6 mm	775.0122	775.0127.1
Ø 2.4 mm	775.0123	775.0128.1
Ø 3.2 mm	775.0124	775.0129.1

Gas nozzle, ceramic (10 pcs.)	Standard version	Ball version	Standard version $x = 36 \text{ mm } x = 60 \text{ mm}$	For gas diffuser
Ø 6.5 mm	777.0081	770.0081.10	777.2171 777.2175	-
Ø 8.0 mm	777.0082	770.0082.10	777.2172 777.2176	-
Ø 9.5 mm	777.0083	770.0083.10	777.2173 -	-
Ø 11.0 mm	777.0084	770.0084.10	777.2174 -	-
Ø 12.5 mm	-	-	- -	778.1183
Ø 16.0 mm	-	-	- -	778.1184
Ø 19.5 mm	-	-	- -	778.1188
Ø 24.3 mm	-	-	- -	778.1189 ³



**ABICOR
BINZEL®**

ABITIG® GRIP 200 & F **Technical data (EN 60 974-7):**

Type of cooling:	air cooled
Rating:	200 A DC 140 A DC
Duty cycle:	35%
Tungsten electrodes:	Ø 1.6–3.2 mm


AABITIG® GRIP 450 W / WK / WKF **Technical data (EN 60 974-7):**

Type of cooling:	liquid cooled
Rating:	420 A DC / 400 A DC 300 A DC / 280 A DC
Duty cycle:	60% / 100%
Tungsten electrodes:	Ø 1.6–4.8 mm

ABITIG® GRIP 450 W SC **Technical data (EN 60 974-7):**

Type of cooling:	liquid cooled
Rating:	480 A DC / 450 A DC 340 A DC / 320 A DC
Duty cycle:	60% / 100%
Tungsten electrodes:	Ø 1.6–4.8 mm


Back cap	Short (10 pcs.)	Medium (1 pc.)	Long (10 pcs.)
	773.0053	773.0055.1	773.0051



Electrode holder / Gas diffuser (5 pcs.)	Electrode holder	Gas diffuser	Gas diffuser	Gas diffuser
Ø 1.6 mm	775.0062	773.0172	773.01125	773.0172
Ø 2.0 mm	775.0067	773.0177	-	773.0177
Ø 2.4 mm	775.0063	773.0173	773.0113	773.0173
Ø 3.2 mm	775.0064	773.0174	773.0114	773.0174
Ø 4.0 mm	775.0065	773.0175	-	773.0175
Ø 4.8 mm	775.0066	773.0176	-	773.0176

Insulator	Standard version (10 pcs.)	For gas diffuser (1 pc.)
	775.1043	775.1143

Gas diffuser 4 (1 pc.)	Standard	Multilayer
Ø 1.6 mm	775.0122	775.0122.1
Ø 2.4 mm	775.0123	775.0128.1
Ø 3.2 mm	775.0124	775.0129.1
Ø 4.0 mm	775.0125	775.0130.1
Ø 4.8 mm	775.0126	-



Gas nozzle, ceramic (10 pcs.)	Standard version x = 26 mm	Standard version x = 37 mm	For gas diffuser
Ø 7.5 mm	-	775.0081	-
Ø 10.0 mm	775.0152 ³	775.0082	775.2172
Ø 12.5 mm	-	-	-
Ø 13.0 mm	775.0153 ³	775.0083	775.2173
Ø 13.0 mm (boosted)	-	775.0183	-
Ø 15.0 mm	-	775.0084	775.2174
Ø 15.0 mm (boosted)	-	775.0184	-
Ø 16.0 mm	-	-	778.1184
Ø 19.5 mm	-	-	778.1188
Ø 24.3 mm	-	-	778.1189





**ABICOR
BINZEL®**



ABITIG® GRIP 18 SC

Technical data (EN 60 974-7):

Type of cooling: liquid cooled

Rating: 400 A DC
280 A AC

Duty cycle: 100%

Tungsten electrodes: Ø 0.5–4.8 mm

Back cap (10 pcs)	Short 712.1053	Long 712.1051
Collets (10 pcs)	Standard version	HL version ¹
Ø 0.5 mm	712.0005 / 10N21	-
Ø 1.0 mm	712.0006 / 10N22	-
Ø 1.6 mm	712.0008 / 10N23	-
Ø 2.4 mm	712.0009 / 10N24	-
Ø 3.2 mm	712.0010 / 10N25	-
Ø 4.0 mm	-	712.6064 / 10H25HD
Ø 4.8 mm	-	712.6065 / 54H20HD 712.6066 / 18C36
Insulating ring (5 pcs)	Insulating ring 712.6043 / 18NG	
Collet body (10 pcs)	Standard version	Standard version with gas lens
Ø 0.5 mm	-	712.6009 / 18G20
Ø 1.0 mm	-	712.6100 / 18G04
Ø 1.6 mm	-	712.6101 / 18GL16
Ø 2.4 mm	-	712.6102 / 18GL32
Ø 3.2 mm	-	712.6103 / 18GL18
Ø 4.0 mm	-	712.6104 / 18GL53
Ø 4.8 mm	-	712.6105 / 18G36
Ø 0.5–3.2 mm	712.6074 / NCB-53	-
Ø 3.2–4.8 mm	-	712.6076 / NCB-36
Gas nozzle, ceramic (10 pcs)	Standard version	Standard version
No. 4 Ø 6.5 mm	701.0420 / 5AN18	-
No. 5 Ø 8.0 mm	701.0421 / 5AN17	701.0427 / 5AN17L
No. 6 Ø 9.5 mm	701.0422 / 5AN16	701.0428 / 5AN16L
No. 7 Ø 11.0 mm	701.0423 / 5AN15	701.0429 / 5AN15L
No. 8 Ø 12.5 mm	701.0424 / 5AN14	-
No. 12 Ø 19.5 mm	701.0426 / 5AN19	-

ABITIG® 9 V / FV

Technical data (EN 60 974-7):

Type of cooling: air cooled

Rating: 110 A DC
80 A AC

Duty cycle: 35%

Tungsten electrodes: Ø 0.5–1.6 mm

ABITIG® 17 V / FV

Technical data (EN 60 974-7):

Type of cooling: liquid cooled

Rating: 140 A DC
100 A DC

Duty cycle: 35%

Tungsten electrodes: Ø 0.5–2.4 mm

ABITIG® 26 V / FV

Technical data (EN 60 974-7):

Type of cooling: air cooled

Rating: 180 A DC
130 A DC

Duty cycle: 35%

Tungsten electrodes: Ø 0.5–4.0 mm





**ABICOR
BINZEL®**

ABICUT 45K

Technical data (EN 60 974-7):

Type of cooling:	air cooled
Pilot current	10–15 A (max. 18 A)
Rating:	40 A (at 60% Duty cycle)
Type of Gas:	Compressed air
Working pressure:	2 bar
Air value defined with nozzle size 0.65 mm:	Ø 1.6–3.2 mm
– Plasma air:	approx. 119 l/min.
Gas post flow:	≥ 60 s
Type of ignition:	Contact
Gas supply:	Compressed air both for plasma and cooling gas
Cutting thickness:	10 mm at 40 A depending on material to be cut and power source

44

ABICUT 25K

Technical data (EN 60 974-7):

Type of cooling:	air cooled
Pilot current	10–15 A (max. 18 A)
Rating:	20 A (at 35% Duty cycle)
Type of Gas:	Compressed air
Working pressure:	2 bar
Air value defined with nozzle size 0.65 mm:	Ø 1.6–3.2 mm
– Plasma air:	approx. 8.5 l/min.
Gas post flow:	≥ 60 s
Type of ignition:	Contact
Gas supply:	Compressed air both for plasma and cooling gas
Cutting thickness:	6 mm at 20 A depending on material to be cut and power source

	ABICUT 25K		ABICUT 45	
Electrode (10 pcs.)	Standard 748.0032.10	long 748.0048.10	Standard 748.0032.10	long 748.0048.10
Swirl ring (2 pcs.)	748.0033.2		748.0033.2	
Nozzle (10 pcs.)	Standard 748.0034.10 long with cross groove 748.0049.10 Standard 748.0034.10 long with cross groove 748.0049.10	Standard 748.0035.10 long with cross groove 748.0061.10	Standard 748.0035.10 long with cross groove 748.0061.10	
Shield cap (2 pcs.)	748.0042.2 25 A (2-hole) 30 A (3-hole) 35 A (4-hole) 45 A (6-hole)	748.0063.2 748.0052.2	748.0043.2	
Distance spring (5 pcs.)	748.0050.5	-	748.0050.5	
Multiple spanner (1 pc.)			748.0059.1	





ABIPLAS® CUT 70 & MT

Technical data (EN 60 974-7):

Type of cooling:	air cooled
Pilot current	15–22 A (max. 25 A)
Rating:	70 A (at 60 % Duty cycle) 50 A (at 100 % Duty cycle)
Type of Gas:	Compressed air
Gas flow:	approx. 155 l/min.
Working pressure:	5–5.5 bar
Air value defined with nozzle size 1.1 mm:	
- Plasma air:	approx. 22 l/min.
- Soft start air:	≥ 12 l/min.
Gas post flow:	≥ 60 s
Type of ignition:	HF
Gas supply:	Compressed air both for plasma and cooling gas
Cutting thickness:	max. 25 mm at 70 A depending on material to be cut and power

Wear parts



Insulator (2 pcs.)		742.D0012
--------------------	--	-----------

Electrode		Standard (10 pcs.) 742.D056		long (5 pcs.) 742.D057
-----------	--	--------------------------------	--	---------------------------

Swirl ring (2 pcs.)		742.D073
---------------------	--	----------

Nozzle	Standard (10 pcs.)	Standard cross groove (10 pcs.)	long (5 pcs.)	long cross groove (5 pcs.)
Ø 0.9 mm / 30 A	742.D008	742.D027	742.D014	742.D029
Ø 1.1 mm / 30-50 A	-	-	742.D038	-
Ø 1.1 mm / 30-60 A	742.D018	742.D028	-	-
Ø 1.2 mm / 50-70 A	742.D041	-	-	-

Shield cap (1 pc.)		742.D078
--------------------	--	----------

Spatter guard (1 pc.)		742.D113
-----------------------	--	----------

Distance holder ¹ (2 pcs.)		742.D010	-	-	-
---------------------------------------	--	----------	---	---	---

Distance holder ¹ (1 pc.)		742.D114	-	-	-
--------------------------------------	--	----------	---	---	---

Distance holder ¹ (1 pc.)	-	-	742.D060	-
--------------------------------------	---	---	----------	---

Distance holder ¹ (2 pcs.)		742.D063	-	-	-
---------------------------------------	--	----------	---	---	---





ABIPLAS® CUT 150 & MT

Technical data (EN 60 974-7):

Type of cooling:	air cooled
Pilot current	15–27 A (max. 25 A)
Rating:	150 A (at 60 % Duty cycle) 120 A (at 100 % Duty cycle)
Type of Gas:	Compressed air
Gas flow:	approx. 235 l/min.
Working pressure:	5–5.5 bar
Air value defined with nozzle size 1.1 mm:	
– Plasma air:	approx. 39 l/min.
– Soft start air:	≥ 15 l/min.
Gas post flow:	≥ 60 s
Type of ignition:	HF
Gas supply:	Compressed air both for plasma and cooling gas
Ignition voltage:	7 kV
Cutting thickness:	max. 55 mm at 150 A depending on material to be cut and power source

Wear parts

Insulator (1 pc.)		757.0032
Electrode (5 pcs.)	Standard long	757.0008 757.0017
Swirl ring (2 pcs.)		757.0060
Nozzle (5 pcs.)	Standard Gouging nozzle long cross groove	757.0037 757.0009 757.0010 757.0011 757.0015 757.0016
Shield cap (1 pc.)		757.0091
Spatter guard (1 pc.)		757.0092
Distance holder ¹ (2 pcs.)	Distance spring	745.0012
Distance holder ¹ (1 pc.)	Bevel cutting nozzle	757.0090
Distance holder ¹ (1 pc.)	Perforation cap	757.0098





ABIPLAS® CUT 200 W / 200 W MT

Technical data (EN 60 974-7):

Type of cooling:	liquid cooled
Pilot current	15–27 A (max. 29 A)
Rating:	200 A / 160 A (at 100 % Duty cycle)
Type of Gas:	Compressed air
Working pressure:	3.5–4.5 bar / 3.5 bar
Air value defined with nozzle size 1.1 mm:	
- Plasma air:	approx. 39 l/min. / approx. 21 l/min.
- Soft start air:	≥ 15 l/min.
Gas post flow:	≥ 60 s
Type of ignition:	HF
Gas supply:	Compressed air for plasma gas
Ignition voltage:	7 kV
Cutting thickness:	max. 70 mm at 200 A / max. 60 mm at 160 A depending on material to be cut and power source

Wear parts

Insulator (1 pc.)		757.D032
--------------------------	--	----------

Electrode (10 pcs.)		Standard 758.0030		Special¹ 758.0031
----------------------------	--	-----------------------------	--	--

Swirl ring (2 pcs.)		Standard 757.D060		Special¹ 758.0028
----------------------------	--	-----------------------------	--	--

Nozzle	Standard (10 pcs.)	Gouging nozzle ² (1 pc.)	Special ¹ (10 pcs.)
Ø 1.0 mm / 40 A	758.0085	-	-
Ø 1.2 mm / 40–70 A	758.0035	-	758.0040
Ø 1.4 mm / 70–90 A	758.0036	-	758.0041
Ø 1.6 mm / 90–120 A	758.0037	-	758.0042
Ø 1.8 mm / 120–160 A	758.0038	-	758.0043
Ø 2.0 mm / 160–200 A	758.0039	-	758.0044
Gouging nozzle	-	758.0073	-

Shield cap (1 pc.)		758.0020
---------------------------	--	----------

Spatter guard (10 pcs.)		758.0026
--------------------------------	--	----------

Distance holder (1 pc.)		Perforation cap 758.0070	Bevel cutting nozzle³ 758.0027	Castellated nozzle 758.0069
--------------------------------	--	------------------------------------	---	---------------------------------------



Titan XQ 350 puls DW EX

MIG/MAG inverter welding machine



Setting range for welding current	5 A - 350 A
Duty cycle 40 °C	350 A / 100 %
Open circuit voltage	82 V
Mains voltage	3 x 400 V
Tolerances	-25 % up to +20 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	19.3 kVA
Wire feed speed	5 m/min - 25 m/min 19.685 ipm - 984.253 ipm
Cooling capacity at 1 l/min.	1.5 kW
Pump pressure	3.5 bar
Tank capacity	8 l
Protection classification	IP23
Safety marking	
EMC class	A
Dimensions (L x B x H)	1152 mm x 686 mm x 976 mm 45.354 Zoll x 27.008 Zoll x 45.354 Zoll
Weight	128.5 kg 283.343 lbs
Standards	IEC 60974-1, -2, -10 CL.A

Titan XQ 400 AC puls DW

MIG/MAG inverter welding machine



Setting range for welding current	5 A - 400 A
Duty cycle 40 °C	400 A / 80 % 370 A / 100 %
Open circuit voltage	82 V
Mains voltage	3 x 400 V
Tolerances	-25 % up to +20 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	23.8 kVA
Wire feed speed	5 m/min - 25 m/min 19.685 ipm - 984.253 ipm
Cooling capacity at 1 l/min.	1.5 kW
Pump pressure	3.5 bar
Tank capacity	8 l
Protection classification	IP23
Safety marking	
EMC class	A
Dimensions (L x B x H)	1152 mm x 686 mm x 976 mm 45.354 Zoll x 27.008 Zoll x 45.354 Zoll
Weight	128.5 kg 283.343 lbs
Standards	IEC 60974-1, -2, -10 CL.A



Pico 160 cel puls



MMA inverter welding machine

Setting range for welding current	5 A - 150 A
Duty cycle 40 °C	150 A / 30 %
	120 A / 60 %
	110 A / 100 %
Open circuit voltage	94 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	9.9 kVA
Protection classification	IP23
Safety marking	
EMC class	A
Dimensions (L x B x H)	370 mm x 129 mm x 236 mm 14.567 Zoll x 5.079 Zoll x 9.291 Zoll
Weight	4.9 kg 10.805 lbs
Standards	IEC 60974-1, -10 CL.A

Pico 180 puls



MMA inverter welding machine

Version	Pico 180 puls
Setting range for welding current	5 A - 180 A
Duty cycle 40 °C	180 A / 25 %
	130 A / 60 %
	120 A / 100 %
Open circuit voltage	98 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	9.3 kVA
Protection classification	IP23
Safety marking	
EMC class	A
Dimensions (L x B x H)	428 mm x 136 mm x 252 mm 16.85 Zoll x 5.354 Zoll x 9.921 Zoll
Weight	8.3 kg 18.302 lbs
Standards	IEC 60974-1, -10 CL.A

Pico 300 cel



MMA inverter welding machine

Version	Pico 300 cel
Setting range for welding current	10 A - 300 A
Duty cycle 40 °C	300 A / 25 %
	220 A / 60 %
	170 A / 100 %
Open circuit voltage	107 V
Mains voltage	3 x 400 V
Tolerances	-25 % up to +20 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	16.3 kVA
Protection classification	IP23
Safety marking	
EMC class	A
Dimensions (L x B x H)	490 mm x 186 mm x 350 mm 19.291 Zoll x 7.323 Zoll x 13.78 Zoll
Weight	16.5 kg
Standards	IEC 60974-1, -10 CL.A



PHOENIX XQ 350 PULS CG | Multiprocess MIG/MAG pulse welding machine



Setting range for welding current	5 A - 350 A
Duty cycle 40 °C	350 A / 80 %
	320 A / 100 %
Open circuit voltage	82 V
Mains voltage	3 x 400 V
Tolerances	-25 % up to +20 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	18.8 kVA
Wire feed speed	0.5 mm/min - 25 mm/min 19.685 ipm - 984.253 ipm
Factory-installed roll equipment	1.0-1.2 mm UNI / Steel
Spool diameter	D200/D300
Torch connection	Euro torch connector
Tank capacity	B1
Protection classification	IP23
Test mark	
EMC class	CE UK CA EAC S A
Dimensions (L x B x H)	1150 mm x 678 mm x 972 mm 45.3 inch x 26.7 inch x 38.3 inch
Weight	113.4 kg 250 lbs
Standards	IEC 60974-1, -5 and -10 CL A

Phoenix 355 Progress puls LP MM TKM



Multiprocess MIG/MAG pulse welding machine with MULTIMATRIX

Setting range for welding current	5 A - 350 A
Duty cycle 40 °C	350 A / 40 %
	300 A / 60 %
	270 A / 100 %
Open circuit voltage	79 V
Mains voltage	3 x 400 V
Tolerances	-25 % up to +20 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	18.8 kVA
Wire feed speed	5 mm/min - 25 mm/min 19.685 ipm - 984.253 ipm
Factory-installed roll equipment	1.0-1.2 mm UNI / Stahl
Spool diameter	D200 / D300
Torch connection	Eurozentralanschluss
Protection classification	IP23
Safety marking	CE UK CA EAC S A
EMC class	
Dimensions (L x B x H)	636 mm x 298 mm x 482 mm 25.039 Zoll x 11.732 Zoll x 18.976 Zoll
Weight	36.2 kg 79.821 lbs
Standards	IEC 60974-1, -5, -10 CL A

Multiprocess MIG/MAG pulse welding machine

50 PHOENIX XQ 400 PULS CW HP DGC



Setting range for welding current	5 A - 400 A
Duty cycle 40 °C	400 A / 60 %
	350 A / 80 %
	320 A / 100 %
Open circuit voltage	82 V
Mains voltage	3 x 400 V
Tolerances	-25 % up to +20 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	23.2 kVA
Wire feed speed	0.5 mm/min - 25 mm/min 19.685 ipm - 984.253 ipm
Factory-installed roll equipment	1.0-1.2 mm UNI / Steel
Spool diameter	D200/D300
Torch connection	Euro torch connector
Cooling capacity at 1 l/min	1000 W
Pump pressure	3.5 bar
Tank capacity	B1
Protection classification	IP23
Test mark	
EMC class	CE UK CA EAC S A
Dimensions (L x B x H)	1150 mm x 678 mm x 972 mm 45.3 inch x 26.7 inch x 38.3 inch
Weight	129.2 kg 284.9 lbs
Standards	IEC 60974-1, -2, -5 and -10 CL A



Picomig 220 & 250 Puls TKG



Multiprocess MIG/MAG pulse welding machine, compact, portable

Version	Picomig 220 puls TKG
Setting range for welding current	5 A - 220 A
Duty cycle 40 °C	220 A / 30 %
	170 A / 60 %
	150 A / 100 %
Open circuit voltage	70 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	8.8 kVA
Factory-installed roll equipment	0.8 + 1.0 mm / Steel
Spool diameter	D200
Torch connection	Euro torch connector
Protection classification	IP23
Test mark	
EMC class	A
Dimensions (L x B x H)	559 mm x 276 mm x 340 mm 22 inch x 10.9 inch x 13.4 inch
Weight	18 kg 39.7 lbs
Standards	IEC 60974-1, -5 and -10 CL.A

Picomig 180 Puls & Synergic TKG



Multiprocess MIG/MAG pulse welding machine, compact, portable

Version	Picomig 180 puls TKG
Setting range for welding current	5 A - 180 A
Duty cycle 40 °C	180 A / 25 %
	120 A / 60 %
	100 A / 100 %
Open circuit voltage	80 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	8 kVA
Wire feed speed	1 m/min - 15 m/min 39.37 ipm - 590.55 ipm
Factory-installed roll equipment	0.8 + 1.0 mm / Stahl
Spool diameter	D200
Torch connection	Eurozentralanschluss
Protection classification	IP23
Safety marking	
EMC class	A
Dimensions (L x B x H)	559 mm x 276 mm x 340 mm 22.008 Zoll x 10.886 Zoll x 13.386 Zoll
Weight	16 kg 35.28 lbs
Standards	IEC 60974-1, -5, -10 CL.A

Picomig 185 Puls & Synergic TKG



MMA inverter welding machine

Setting range for welding current	5 A - 180 A
Duty cycle 40 °C	180 A / 25 %
	120 A / 60 %
	100 A / 100 %
Open circuit voltage	80 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	8 kVA
Wire feed speed	0.5 m/min - 25 mm/min 19.68 ipm - 944.88 ipm
Factory-installed roll equipment	0.8-0.9-1.0 mm UNI / Stahl
Spool diameter	D200 / D300
Torch connection	Eurozentralanschluss
Protection classification	IP23
Safety marking	
EMC class	A
Dimensions (L x B x H)	636 mm x 298 mm x 482 mm 25.039 Zoll x 11.732 Zoll x 18.976 Zoll
Weight	23.8 kg 52.479 lbs
Standards	IEC 60974-1, -5, -10 CL.A



Taurus XQ 350 Synergic DW EX



Multiprocess MIG/MAG welding machine

Version	Taurus XQ 350 Synergic DW EX
Setting range for welding current	5 A - 350 A
Duty cycle 40 °C	350 A / 100 %
Open circuit voltage	82 V
Mains voltage	3 x 400 V
Tolerances	-25 % up to +20 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	18.8 kVA
Cooling capacity at 1 l/min.	1000 W
Pump pressure	3.5 bar
Tank capacity	8 l
Protection classification	IP23
Test mark	
EMC class	A
Dimensions (L x B x H)	1150 mm x 678 mm x 972 mm 45.3 inch x 26.7 inch x 38.3 inch
Weight	125.5 kg 276.7 lbs
Standards	IEC 60974-1, -2 and -10 CL A

Taurus 355 Synergic S HP MM TKM



Multiprocess MIG/MAG welding machine with MULTIMATRIX technology

Setting range for welding current	5 A - 350 A
Duty cycle 40 °C	350 A / 40 % 300 A / 60 % 270 A / 100 %
Open circuit voltage	79 V
Mains voltage	3 x 400 V
Tolerances	-25 % up to +20 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	18.8 kVA
Wire feed speed	0.5 m/min - 25 m/min 19.68 ipm - 944.88 ipm
Factory-installed roll equipment	1.0-1.2 mm UNI / Stahl
Spool diameter	D200 / D300
Torch connection	Eurozentralanschluss
Protection classification	IP23
Safety marking	
EMC class	A
Dimensions (L x B x H)	636 mm x 298 mm x 482 mm 25.039 Zoll x 11.732 Zoll x 18.976 Zoll
Weight	36 kg 79.38 lbs

Taurus 355 Basic TDM



Multiprocess MIG/MAG welding machine, decompact, portable, modular



Setting range for welding current	5 A - 350 A
Duty cycle 40 °C	350 A / 60 % 300 A / 100 %
Open circuit voltage	79 V
Mains voltage	3 x 400 V
Tolerances	-25 % up to +20 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	18.8 kVA
Protection classification	IP23
Safety marking	
EMC class	A
Dimensions (L x B x H)	625 mm x 298 mm x 531 mm 24.606 Zoll x 11.732 Zoll x 20.906 Zoll
Weight	41 kg 41 kg 90.405 lbs



TETRIX XQ 230 PULS AC/ DC EXPERT 3.0 5P



TIG AC/DC pulse welding machine

Setting range for welding current	3 A - 230 A
Duty cycle 40 °C	230 A / 40 %
	200 A / 60 %
	170 A / 100 %
Open circuit voltage	96 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	7.4 kVA
Protection classification	IP23
Test mark	CE UK EAC S
EMC class	A
Dimensions (L x B x H)	550 mm x 224 mm x 415 mm 21.7 inch x 8.8 inch x 16.3 inch
Weight	19.2 kg 42.3 lbs
Standards	IEC 60974-1, -3 and -10 CL A

TETRIX 230 AC/DC COMFORT 5P TM



Modular AC/DC TIG inverter welding machine, gas- or water-cooled

Setting range for welding current	3 A - 230 A
Duty cycle 40 °C	230 A / 40 %
	200 A / 60 %
	170 A / 100 %
Open circuit voltage	45 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	7.4 kVA
Protection classification	IP23
Safety marking	CE EAC
EMC class	A
Dimensions (L x B x H)	539 mm x 210 mm x 415 mm 21.22 Zoll x 8.268 Zoll x 16.339 Zoll
Weight	18.8 kg 41.454 lbs
Standards	IEC 60974-1, -3, -10 CL A

Tetrix XQ 500 puls AC/DC W EX 5P



TIG AC/DC pulse welding machine

Version	Tetrix XQ 500 puls AC/DC W Expert 3.0 5P R1.5m
Setting range for welding current	3 A - 500 A
Duty cycle 40 °C	500 A / 40 %
	400 A / 80 %
	370 A / 100 %
Open circuit voltage	82 V
Mains voltage	3 x 400 V
Tolerances	-25 % up to +20 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	26.2 kVA
Cooling capacity at 1 l/min.	1000 W
Pump pressure	3.5 bar
Tank capacity	8 l
Protection classification	IP23
Test mark	CE UK EAC S
EMC class	A
Dimensions (L x B x H)	1150 mm x 678 mm x 972 mm 45.3 inch x 26.7 inch x 38.3 inch
Weight	129.5 kg 285.5 lbs
Standards	IEC 60974-1, -2, -3 and -10 CL A



e-shop

Tetrix 300 AC / DC Comfort 2.0 puls 5P TM



TIG AC / DC welding machine, portable, modular, decentralized

Welding current setting range	5 A - 300 A	-	5 A - 300 A
Duty cycle 40 °C	35% / 300 A		
	60% / 260 A		
	100% / 210 A		
Open circuit voltage	63 V		
Mains voltage	3 x 400 V		
Network tolerances	-25% to +20%		
Grid frequency	50 Hz / 60 Hz		
Recommended generator power	15.8 kVA	-	15.8 kVA
Protection class	IP23		
Safety marking	S mark / CE mark / EAC mark		
EMC class	A		
Dimensions (L x W x H)	539 mm x 210 mm x 415 mm		
Weight	22.6 kg		
Norms	IEC 60974-1; -3; -10 CL A		

Tetrix 200 DC Comfort 2.0 puls 5P



TIG-DC welding machine, portable, gas-cooled, decentralized

Execution	Tetrix 200 DC Comfort 2.0 puls 5P
Welding current setting range	5 A - 200 A
Duty cycle 40 °C	25% / 200 A
	60% / 150 A
	100% / 140 A
Open circuit voltage	63 V
Mains voltage	1 x 230 V
Network tolerances	-40% to +15%
Grid frequency	50 Hz / 60 Hz
Recommended generator power	8.1 kVA
Torch connection	Tuchel, 5-pin
Protection class	IP23
Safety marking	S mark / CE mark / EAC mark
EMC class	A
Dimensions (L x W x H)	428 mm x 181 mm x 294 mm
Weight	10 kg
Norms	IEC 60974-1; -3; -10 CL A

Picotig 200 puls TG



TIG-DC welding machine, portable, gas-cooled, decentralized

Setting range for welding current	5 A - 200 A
Duty cycle 40 °C	200 A / 25 %
	150 A / 60 %
	140 A / 100 %
Open circuit voltage	90 V
Mains voltage	1 x 230 V
Tolerances	-40 % up to +15 %
Mains frequency	50 Hz / 60 Hz
Recommended generator power	8.1 kVA
Protection classification	IP23
Safety marking	CE
EMC class	A
Standards	IEC 60974-1; -3 and -10 CL A





WELDING MACHINE
MULTIPEARL 210-4XL
240V
065109



CART FOR WELDING
MACHINE - 3 SEATS
070967



WELDING MACHINE
MMA GYSARC 300 TRI
064959



PLASMA FOR CUTTING
PLASMA CUTTER 45 CT
014787



CART FOR WELDING
MACHINE
90x51x99cm 071568



WELDING HOOD FLAME
RETARDANT
ANTISTATIC 037687



WELDING REEL WIRE
MAG STEEL 0.9kg D.100
- ER70S-6 / G3Si1
086593



WELDING REEL WIRE
MAG INOX Ø0.8 1kg
D.100 - ER308LSi / G
199 L Si 086616



WELDING REEL WIRE
MIG CuSi3 Ø0.8 - 1kg
D.100 - ERCuSi-A / S
Cu6560 086692



WELDING REEL WIRE
FLUX CORED NO GAS
Ø0.9 - 0.9Kg S100 -
E71T-GS 086104



WELDING REEL WIRE
MIG ALUMINUM
AlMg5 Ø0.8 - 0.5kg
D.100 - ER5356/S Al
5356 086548



WELDING REEL WIRE
MIG ALUMINUM AISi5
Ø0.8 - 0.5kg D.100 -
ER4043/S Al 4043A
086685



e-shop

www.roussakis.com.gr



ABIPLAS® CUT 70/150 & MT



GERMANY

PLASMA FOR METAL CUTTING KJELLBERG CUTi

Model	Cutting thickness
CUTi 35	12mm
CUTi 70	30mm
CUTi 90	35mm
CUTi 120	50mm




PLASMA FOR METAL CUTTING HYPERTHERM POWERMAX

Model	Cutting thickness
Powemax45	16mm
Powemax65	20mm
Powemax85	25mm
Powemax105	32mm
Powemax125	38mm

Hypertherm®



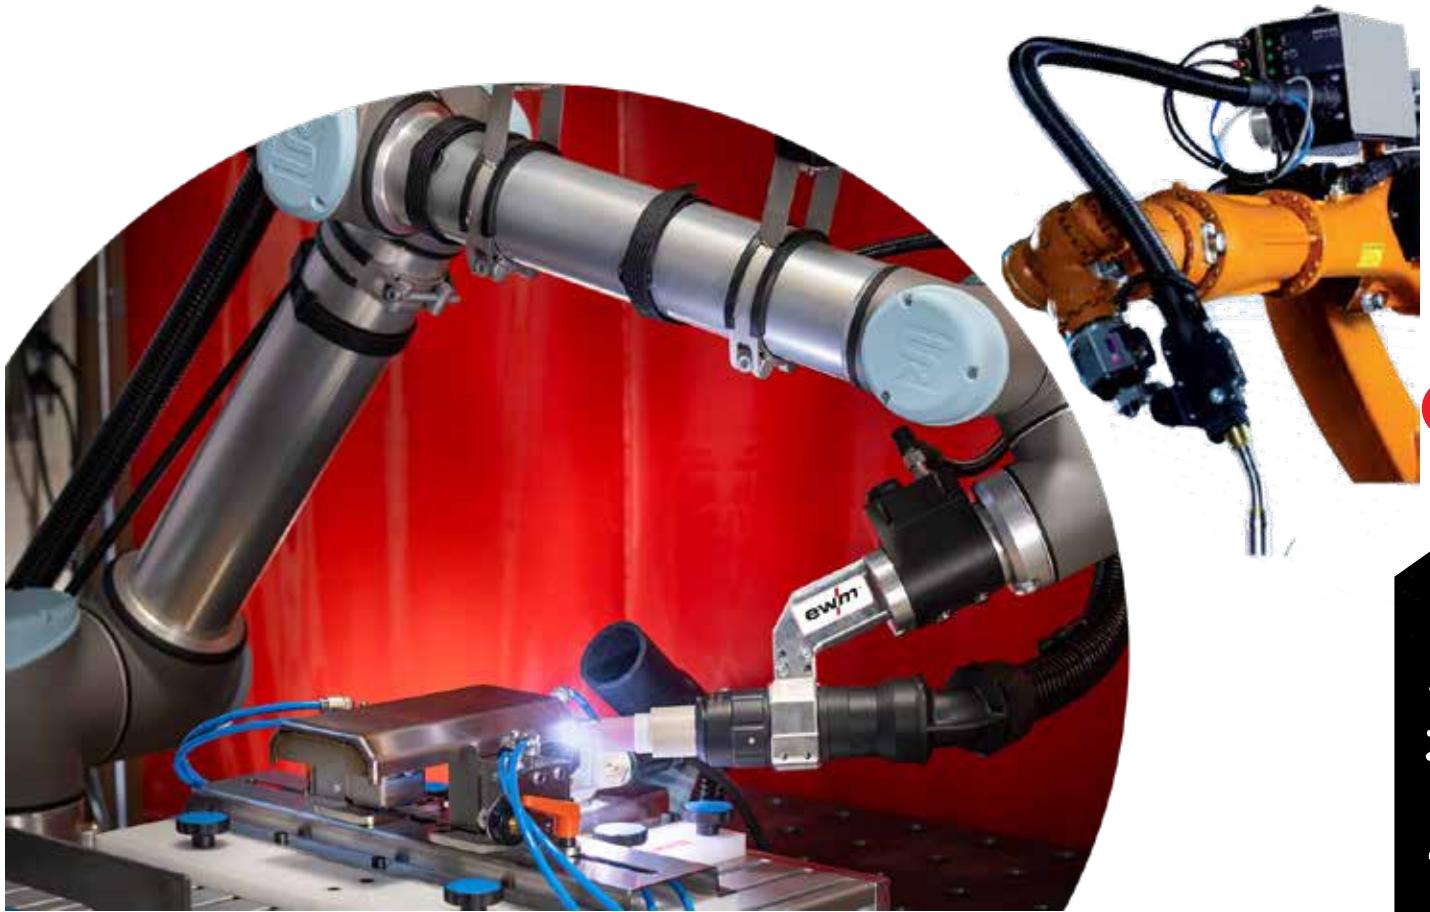

57

Roussakis



e-shop

www.roussakis.com.gr





59

Roussakis



e-shop

www.roussakis.com.gr

| BEVELLING MACHINES TAG PIPE | Air, Battery, Electric

Model	Range
PREP 2 & AUTO	1/2"- 1 1/2" 12.5mm- 42mm i/d
PREP 3	1"- 3"
PREP 4	28mm- 76mm i/d 1"- 4"
PREP 8	20mm- 108mm i/d 2"- 8" 50mm- 203mm i/d



PIPE EQUIPMENT SPECIALISTS LTD



| TAG PIPE PREP 20
4" - 20" | 100mm - 500mm i/d



| PREHEATER FOR PIPE
WELDING


| PIPE CUTTERS - BEVELLING
MACHINES TAG PIPE | 1"-54"



ITAG E-Z Fit Spider Internal Clamps



| Series 100



| Series 400



| Series 500



| Tape for marking pipe



| TAG E-Z Fit Single Chain Pipe Clamps



| TAG Cage Clamps



| LEVEL TORPEDO DEGREE WITH 3 VIALS D207



| POCKET LEVEL MAGNETIC DEGREE D208




| PIPE CENTERING LEVEL & MAGNET D206

INSIZE



| WELDING VERNIER CALIPER 4835-1



| VERNIER CALIPER 0-15X0.05mm 1205-150S



| DIGITAL VERNIER CALIPER



| MARKING RULER 7120



| PROTRACTOR 0-180 DEGREES



| GAUGE OF WELDING WORKS 4830



| ELECTRONIC PROTRACTOR 0-360°



e-shop

AXXAIR Pipe cutters - Welding



AXXAIR PIPE CUTTERS
5mm – 228mm
171ECO2



AXXAIR PIPE CUTTER
Ø5–Ø78mm 1010W 220V
CC81M 81M21



AXXAIR ORBITAL TIG
WELDING 200A
SAXX-200DG



AXXAIR ORBITAL TIG
WELDING CART SAXX-200
SACG-X200



ORBITAL PIPE
WELDING OPENED HEAD
Ø19 – Ø115mm
SATO-115E42



AXXAIR ORBITAL WELDING
CLOSED HEAD
Ø6 – Ø77mm SATFX-76



AXXAIR ORBITAL COOLER
TIG WELDING
SCOOOL-700



AXXAIR PIPE PURGE
WELDING SPPM-10
SPPM-10



AXXAIR PIPE CUTTER DISC
LS63100



AXXAIR ORBITAL FACING
ΦΡΕΖΑΣ Ø3 – Ø63.5mm 230V
DC65-MA2



AXXAIR COOLER ORBITAL
TIG WELDING
SCE16-44.5



AXXAIR INSERTS FOR
ORBITAL FACING 10pcs
HSS 9mm DC-OUT3





ORBITAL S7 COMPACT MV



Opened type head



Closed type head



Cutting Block



Head for welding pipe - flange



Opened type head



Oxygen meter



K20



63



K50-600



K60

Rolling motors KRAIS



e-shop

www.roussakis.com.gr

Roussakis

| TAG Welding pipe seals 3/4" - 12"



PPM
PIPE PURGE MASTERS



| Double seal purge system
016-165mm

| TAG Expanding pipe stoppers



| Steel



| Teflon



| Aluminum



| Digital Monitor for oxygen levels
AQUASOL PRO OX®-100 Kit



| Monitor for welding oxygen levels
Handy Purge 100



| Inflatable pipe stoppers 2" - 80"





PIPE STANDS

* Suitable for
Stainless Steel

**Tri Stand
(base only)**



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
TPS300	1,585kg / 3,500lbs	7.6kg / 17lbs	1-24"

Vee-Head



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
TVH300	1,585kg / 3,500lbs	3.4kg / 7lbs	Up to 12"

**Steel Wheel
(slip on style)**



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
SWH300	450kg / 990lbs	3.4kg / 7lbs	1-12"
* SWH300SS	450kg / 990lbs	3.4kg / 7lbs	1-12"

**Nylon Wheel
(slip on style)**



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
* NWH300	450kg / 992lbs	2kg / 5lbs	1-12"

**Ball Transfer
(slip on style)**



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
BTH300	450kg / 990lbs	2.5kg / 6lbs	1-12"
* BTH300SS	450kg / 990lbs	2.5kg / 6lbs	1-12"

Pipe Chain Vice



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
PCV300	1000kg / 2205lbs	6.5kg / 14.3lbs	0.5-6"

**Folding Tri Stand
(base only)**



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
TFS301	1,585kg / 3,500lbs	7.6kg / 17lbs	1-24"

Large Vee Head (see page 7 for Head options)



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
TVH300L	1,585kg / 3,500lbs	7.6kg / 17lbs	Up to 24"

Steel Wheel



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
SWH350	1,000kg / 2,205lbs	4.9kg / 11lbs	1-24"
* SWH350SS	1,000kg / 2,205lbs	4.9kg / 11lbs	1-24"

Nylon Wheel



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
* NWH350	450kg / 990lbs	3.3kg / 7lbs	1-24"

Roller Bar



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
RBH300	1,000kg / 2,205lbs	4.25kg / 9lbs	n/a
PBH300	1,000kg / 2,205lbs	4.25kg / 9lbs	Up to 12"

**Stainless Steel
(slip on style)**



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
* SSH300	1,585kg / 3,500lbs	1.0kg / 2lbs	1-12"



e-shop

www.roussakis.com.gr



Welding magnetic carriage
MOGGY

GULLCO
WELDING AND CUTTING AUTOMATION



Submerged arc welding carriage
SAM

GULLCO
WELDING AND CUTTING AUTOMATION

Welding carriage to flexible
track
KAT



Welding carriage to rigid track
PIPE
KAT



Welding automation carriage
KAT





PIPE CUTTER
PipeCut 220E System



PIPE CUTTER
PipeCut 280 Pro Series



PIPE CUTTER
PipeCut 460 Pro Series



PIPE CUTTER
PipeCut 170E System



PIPE CUTTER
PipeCut 360 Pro Series



PIPE CUTTER
PipeCut 220 INOX



PIPE BEVEL MACHINE
PipeBevel 360E System



PIPE CUTTER DISC
DIAMOND X140



PIPE CUTTER DISC
TCT 165



PIPE CUTTER DISC
Cermet 165




PIPE CUTTER DISC
TCT 140



e-shop

www.roussakis.com.gr

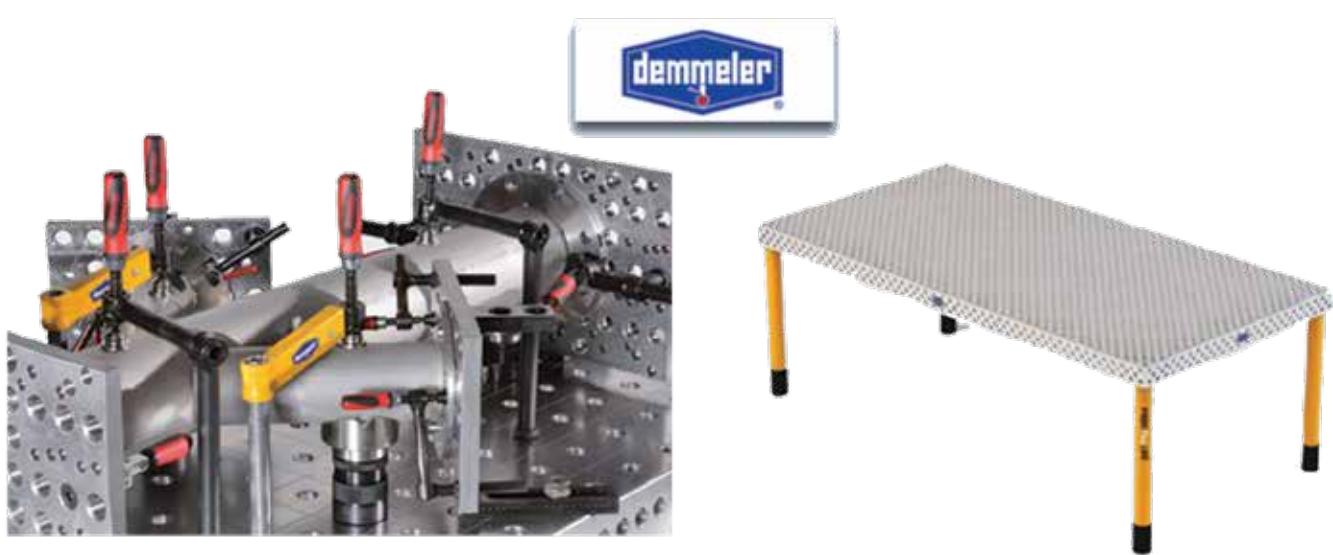

BUILDPRO®
Welding Tables



68

|Metal markers MARKAL



| Electrodes TIG - Red/Grey/Gold/Green/Blue



ΔΙΑΜΕΤΡΟΣ
Ø 1.0mm
Ø 1.6mm
Ø 2.0mm



Ø 2.4mm
Ø 3.2mm

ABICOR BINZEL

| Electrodes Grinder TIG
EWM TGM 40230 HANDY



ewm



LUBRICATING PASTE
DRILLING 80ml INOX
SURF-TAP

25lt
200lt



CUTTING LIQUID FOR
ALL METALS 500ml
SURF TAP

25lt
200lt



CUTTING LIQUID FOR
ALUMINUM 500ml
SURF TAP

25lt
200lt



LUBRICATING SPRAY
DRILLING 400ml
SURF TAP



Sodium hypochlorite
solution 12-14%



Caustic soda solution
15-20%



Hydrochloric (muriatic)
acid 32-34%



Cleaning Gel
Inox



Borax for Soldering
Brazing



CUTTING SOAP OIL
LUBRICOOL No 18
4lt / 13lt / 20lt



SURFACE CLEANING SPRAY
INOX CLINOX GREEN
500ml



e-shop

www.roussakis.com.gr



Ceramic spray MIG &
ceramic coating cap



Anti-spatter spray
BINZEL SUPER PISTOL



Anti-spatter paste
BINZEL DUSOFIX



Gas leak control
spray



Cracks detector spray



PENTRIX



RIVELEX



ZINCOSIL

SILICONI
Commerciale SpA



Inox Spray - Aluminum



ALUSIL



MOB LUBE



RAME LUB



SPECIAL LUBE

Lubricating spray

Lubricating - Cutting spray





Cleaning - Lubricating spray WD-40



Lubricating spray MORRIS



Cleaning - polishing spray MORRIS

Color spray COSMOSLAC





BRONZE



300A



SIRIO 8



DELTA 6

|Grounding clamps & Bench Grounding clamps

600A Rotary



500A Magnetic



Rotating



|Ovens - Electrode dryers

|Electrode torches 400-600A



|Hammers




|Electrodes ARCAIR



|Electrode torches ARCAIR



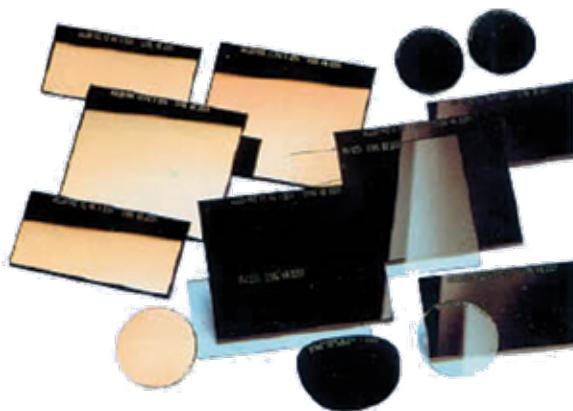

| Welding glasses

| Welding cables
16-90mm

| Quick connector male 25-50-70





| Quick connector female 25-50-70



| Cable terminals 16-90mm



| Machine plug base 25-50mm

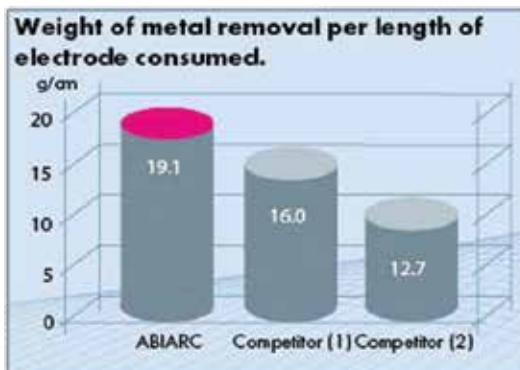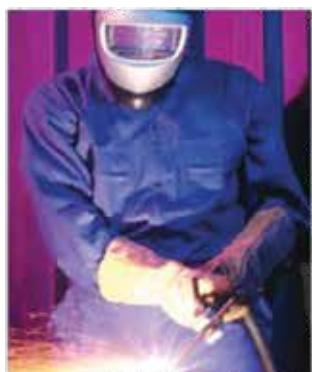

| Carbon electrodes

ABIARC Gouging electrodes (DC) pointed

Type		Ampere	Pcs.	Part.-No.
4 x 305 mm	(5/32" x 12")	250	50	515.0015
5 x 305 mm	(3/16" x 12")	300	50	515.0016
6.5 x 305 mm	(1/4" x 12")	400	50	515.0017
8 x 305 mm	(5/16" x 12")	500	50	515.0018
9.5 x 305 mm	(3/8" x 12")	600	50	515.0019
13 x 355 mm	(1/2" x 14")	900	50	515.0020



e-shop

www.roussakis.com.gr



| Wire rolls Ø0.6, 0.8, 1, 1.2, 1.6

ΣΥΡΜΑ SG2 SPIRA-SPIRA

Φ	0.8mm
Φ	1.0mm
Φ	1.2mm
Φ	(5kg)0.6mm
Φ	(5kg)0.8mm

ΣΥΡΜΑ INOX 308 LSi

Φ	0.8mm
Φ	1.0mm
Φ	1.2mm
Φ	(5kg)0.8mm
Φ	(5kg)1.0mm

ΣΥΡΜΑ INOX 316 LSi

Φ	0.8mm
Φ	1.0mm
Φ	1.2mm
Φ	(5kg)0.8mm
Φ	(5kg)1.0mm

ΒΕΡΓΕΣ ΤΙΓ ΑΛΟΥΜΙΝΙΟΥ 5356 - 4043

Φ	2.0mm
Φ	2.4mm
Φ	3.2mm

ΣΥΡΜΑ ΑΛΟΥΜ. 5356-4043

Φ	0.8mm
Φ	1.0mm
Φ	1.2mm
Φ	(2kg)0.8mm
Φ	(2kg)1.0mm

**ΒΕΡΓΕΣ ΤΙΓ ΙΝΟΧ 308-316 LSi
ΣΙΔΗΡΟΥ SG2 / 3/4**

Φ	1.2mm
Φ	1.6mm
Φ	2.0mm
Φ	2.4mm
Φ	3.2mm

ΒΕΡΓΕΣ ΧΑΛΚΟΚΟΛΛΗΣΗΣ

Φ	3.0mm
---------	-------

ΒΕΡΓΕΣ ΜΠΡΟΥΤΖΟΚΟΛΛΗΣΗΣ

Φ	2.5mm
Φ	3.0mm

ΒΕΡΓΕΣ ΑΣΗΜΟΚΟΛΛΗΣΗΣ

Φ	1.6mm	20%
Φ	2.0mm	30%
Φ	2.5mm	40%

ELECTRODES

FULL SERIES OF ELECTRODES (common, basic, stainless steel, aluminum, manganese, cast iron, etc.)





OERLIKON SUPERCITO

2.5mm/3.0kg **9238107**

3.2mm/4.5kg **9238109**

4.0mm/4.5kg **9238111**

5.0mm/4.5kg **9238112**



OERLIKON FINCORD

2.0mm/3.5kg **9238306**

2.5mm/4.0kg **9238307**

3.2mm/4.0kg **9238309**


4.0mm/4.0kg **9238311**

5.0mm/4.0kg **9238312**



OERLIKON CITOCUT

4.0mm/4.5kg **92386000011**



OERLIKON CITODUR

3.2mm/5.5kg **9238820**

4.0mm/5.5kg **9238822**



OERLIKON OVERCORD-S

2.5mm/3.5kg **9238707**

3.2mm/4.5kg **9238709**

4.0mm/4.5kg **9238711**



OERLIKON REX

2.5mm/4.0kg **9238807**

3.2mm/4.0kg **9238809**

4.0mm/4.0kg **9238811**



OERLIKON FERROCITO-R

4.0mm/4.5kg **9238611**

5.0mm/4.5kg **9238614**



BOHLER FOX EV50 7018.1

2.5mm/4.2kg **11543**

3.2mm/4.2kg **68550**

4.0mm/5.8kg **10101**

BOHLER FOX 7018

2.5mm/4.1kg **11526**

3.2mm/4.2kg **11527**

4.0mm/5.9kg **10962**

BOHLER COMMON 6013

2.5mm/5kg **81518**

3.2mm/5kg **81520**



KJELLBERG CUTTING AQUACUT

3.25mm X 450mm **00.994.324.KQ3**

KJELLBERG WELDING AQUAWELD

3.25mm X 350mm **00.995.323.000**



e-shop

www.roussakis.com.gr



|MAXIFIL



|SMARTMASTER



|MINIFIL



|MAXIFIL FOR WALL

KEMPER®



ABICOR
BINZEL





SAW BLADE
Bi-lastic ZpZ8 >8mm
SSF1201I



SAW BLADE
Bi-lastic ZpZ10-14
3-8mm **SSF1201Z**



SAW BLADE
Bi-lastic ZpZ18 1.5-
3.0mm **SSF1201N**



SAW BLADE
PALETTE REPAIR Bi-lastic
225x19x0.90mm ZpZ 10-14
SSF1221ZL



AIR SAW BLADE ZpZ10
Co5 BRILLIANT METAL
ISE3403J



HOLE SAWS Bi-Co-lastic
ZpZ4/6
14-111mm
HSM014V - HSM111V



HOLE SAW CENTERING
HZASW95
HZASW95



|Circular saw



|Bandsaws



|Bandsaws



|Bandsaw rolls



e-shop

www.roussakis.com.gr



|ECO.100s+ / ct



|ECO.30S+ 220V



|ECO.32+ 220V



|ECO.40S+ 220V



|ECO.50S+ 220V



|VACUUM VAC.50s+



TUBE.30 220V
for plate and pipe
drilling

 **EUROBOOR**
FOR PROFESSIONALS BY PROFESSIONALS



|ECO.36+ 220V



|B60S
Plate Bevel machine





|MABASIC 200



|MABASIC 400



|MABASIC 850



|MAB 525



|MAB 485



|MAB 845 SB



|MAB 150



|AUTOMAB 450



|AUTOMAB 825 KTS



e-shop

www.roussakis.com.gr



|Cutter chuck


Cutter adapter



|Cutter liquid



|Gutter guide

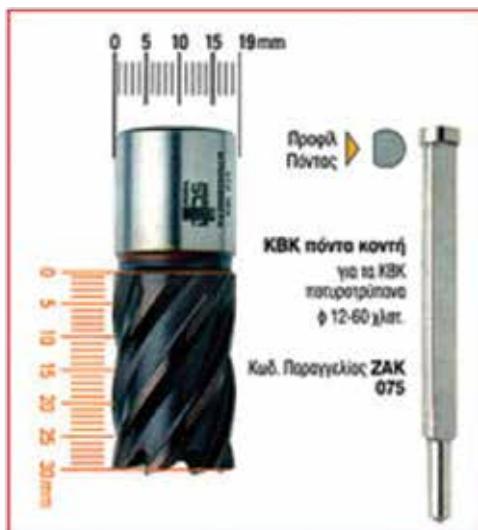

Wire brush for chip removal



Magnetic chip cleaner



|Cooling oil



|Cutter cutting oil



|Cutting oil in spray



|Cutting paste

EUROBOOR
FOR PROFESSIONALS BY PROFESSIONALS



|Cutting / lubricating oil





e-shop

www.roussakis.com.gr



| ROTARY BURR CYLINDER TYPE B DIAMOND

Code	Teeth	D1	D2	L1	L2
RBD.B0806	Diamond	8 mm	6 mm	20 mm	65 mm
RBD.B1006	Diamond	10 mm	6 mm	20 mm	65 mm
RBD.B1206	Diamond	12 mm	6 mm	25 mm	70 mm
RBD.B1606	Diamond	16 mm	6 mm	25 mm	70 mm



| ROTARY BURR CYLINDER OVAL TYPE C DIAMOND

Code	Teeth	D1	D2	L1	L2
RBD.C1006	Diamond	10 mm	6 mm	20 mm	65 mm
RBD.C1206	Diamond	12 mm	6 mm	25 mm	70 mm
RBD.C1606	Diamond	16 mm	6 mm	25 mm	70 mm



| ROTARY BURR SPHERICAL TYPE D DIAMOND

Code	Teeth	D1	D2	L1	L2
RBD.D0806	Diamond	8 mm	6 mm	7.5 mm	52 mm
RBD.D1006	Diamond	10 mm	6 mm	9 mm	54 mm
RBD.D1206	Diamond	12 mm	6 mm	10 mm	55 mm
RBD.D1606	Diamond	16 mm	6 mm	14 mm	59 mm



| ROTARY BURR OVAL TYPE E DIAMOND

Code	Teeth	D1	D2	L1	L2
RBD.E0806	Diamond	8 mm	6 mm	13 mm	58 mm
RBD.E1006	Diamond	10 mm	6 mm	16 mm	61 mm
RBD.E1206	Diamond	12 mm	6 mm	20 mm	65 mm
RBD.E1606	Diamond	16 mm	6 mm	25 mm	70 mm



| ROTARY BURR CYLINDER BALL NOSE TREE TYPE F DIAMOND

Code	Teeth	D1	D2	L1	L2
RBD.F0806	Diamond	8 mm	6 mm	20 mm	65 mm
RBD.F1006	Diamond	10 mm	6 mm	20 mm	65 mm
RBD.F1206	Diamond	12 mm	6 mm	25 mm	70 mm
RBD.F1606	Diamond	16 mm	6 mm	25 mm	70 mm



| ROTARY BURR ARC POINTED TREE TYPE G DIAMOND

Code	Teeth	D1	D2	L1	L2
RBD.G0806	Diamond	8 mm	6 mm	20 mm	65 mm
RBD.G1006	Diamond	10 mm	6 mm	20 mm	65 mm
RBD.G1206	Diamond	12 mm	6 mm	25 mm	70 mm
RBD.G1606	Diamond	16 mm	6 mm	25 mm	70 mm





| ROTARY BURR OVAL TYPE H DIAMOND

Code	Teeth	D1	D2	L1	L2
RBD.H0806	Diamond	8 mm	6 mm	20 mm	65 mm
RBD.H1006	Diamond	10 mm	6 mm	20 mm	70 mm
RBD.H1206	Diamond	12 mm	6 mm	25 mm	77 mm
RBD.H1606	Diamond	16 mm	6 mm	25 mm	81 mm



| ROTARY BURR CONICAL OVAL TYPE L DIAMOND

Code	Teeth	D1	D2	L1	L2
RBD.L0806	Diamond	8 mm	6 mm	22 mm	67 mm
RBD.L1006	Diamond	10 mm	6 mm	25 mm	70 mm
RBD.L1206	Diamond	12 mm	6 mm	28 mm	73 mm
RBD.L1606	Diamond	16 mm	6 mm	33 mm	78 mm



| ROTARY BURR CONICAL TYPE M DIAMOND

Code	Teeth	D1	D2	L1	L2
RBD.M0806	Diamond	8 mm	6 mm	20 mm	65 mm
RBD.M1006	Diamond	10 mm	6 mm	20 mm	65 mm
RBD.M1206	Diamond	12 mm	6 mm	25 mm	70 mm
RBD.M1606	Diamond	16 mm	6 mm	25 mm	70 mm

| GRINDING STONES TYPE A CYLINDER



Code	Dimensions
113-TRTA15X25	15x25mm
113-TRTA20X25	20x25mm
113-TRTA25X25	25x25mm
113-TRTA25X40	25x40mm
113-TRTA30X15	30x15mm
113-TRTA30X20	30x20mm
113-TRTA30X25	30x25mm
113-TRTA30X30	30x30mm
113-TRTA30X40	30x40mm
113-TRTA40X30	40x30mm
113-TRTA40X40	40x40mm
113-TRTA40X50	40x50mm
113-TRTA50X30	50x30mm
113-TRTA50X40	50x40mm
113-TRTA50X50	50x50mm

| GRINDING STONES TYPE B TREE SHAPE



Code	Dimensions
113-TRTB10X20	10x20mm
113-TRTB15X25	15x25mm
113-TRTB20X30	20x30mm
113-TRTB25X30	25x30mm
113-TRTB30X40	30x40mm
113-TRTB40X30	40x30mm

| BLUE GRINDING STONES WITH AXIS FOR INOX & HARD ALLOYS



Code	Dimensions
ZY1632.06HK30NV13	16x32mm
ZY2032.06HK30NV13	20x32mm
ZY4025.08HK20/30P	40x25mm
ZY2040.06HK30NV13	20x40mm
ZY25010.06HK30NV1	50x10mm
ZY2532.06HK30NV13	25x32mm
ZY4020.06HK30NV13	40x20mm
ZY3250.08HK30N13	32x50mm

| GRINDING STONES TYPE E TREE SHAPE



Code	Dimensions
113-TRTE15	15mm
113-TRTE20	20mm
113-TRTE25	25mm
113-TRTE30	30mm

| GRINDING STONES CYLINDER WITH AXIS FOR INOX



Code	Dimensions
ZY1020/6ADW46	10x20mm
ZY1632/6ADW30L6	15x20mm
ZY20256ADW30L6B	20x25mm
ZY2032/6AR3005V	20x32mm
ZY20406ADW30L6B	20x40mm
ZY25326ADW30L6B	25x32mm
ZY32326ADW30L6B	32x32mm



Cutting discs - Wirebrushes KLINGSPOR



**CUTTING DISC INOX
A 24 N Supra**



Code	Dimensions
2951	125x2.5x22
2922	125x6x22
13412	180x6x22
13477	230x3.0x22
13432	230X6X22

**CUTTING DISC INOX
A 24 TZ Special**



Code	Dimensions
136555	125X2.5mm

**CUTTING DISC INOX
K 960 TX SPECIAL CERAMIC**



Code	Dimensions
328886	125x1x22

**STEEL CUTTING DISC
A 24 Extra**



Code	Dimensions
188463	125x2.5x22mm
188465	115x6x22mm
188466	125x6x22mm
188466	125x3.2x22mm

**WIREBRUSH BEVEL
STRAIGHT STEEL BT 600 W**




Code	Dimensions
358372	65xM14
358373	80xM14
358375	100xM14

**CUTTING DISC INOX
A 46 TZ Special**



Code	Dimensions
221161	180x1.6x22
265044	230x1.9x22

**CUTTING DISC INOX
A 46 VZ Special**



Code	Dimensions
298177	125x2x22.2mm

**CUTTING DISC INOX
A 24 Extra**



Code	Dimensions
13490	180x3x22mm
13444	180x6x22mm
13447	230x6x22mm

**ALUMINUM GRINDING DISC
A 46 N SUPRA**



Code	Dimensions
2226	125x6x22mm

**ALUMINUM CUTTING DISC
A 46 N Supra**



Code	Dimensions
170710	230x3x22mm

**WIREBRUSH TWIST STEEL
BR 600 Z**



Code	Dimensions
358335	65xM14
358337	80xM14
358338	100xM14

**CUTTING DISC INOX
A 660 R Supra**



Code	Dimensions
329096	50x1x6mm
329098	76x1x6mm
329102	100x1x6mm

**CUTTING DISC INOX
A 60 TZ Special**



Code	Dimensions
202401	125x1x22mm

**CUTTING DISC INOX
A 60 Extra**



Code	Dimensions
262936	115x1x22.23mm

**CUTTING DISC INOX
A 980 TZ Special**



Code	Dimensions
322183	125x0.8x22mm

**BETON CUTTING DISC
C 24 Extra**



Code	Dimensions
188464	125x2.5mm

**STEEL CUTTING DISC
A 330 EXTRA**



Code	Dimensions
353326	356x2.5x25.4mm

**WIREBRUSH TWIST
INOX BR 600 Z**



Code	Dimensions
358343	125x06x22

**WIREBRUSH TWIST
INOX BT 600 Z**



Code	Dimensions
358340	65xM14





POWERED HYDRAULIC
BENDER 2408
240842



PORTABLE ELECTRIC
SCREWDRIVER PHENIX III
137563



THREADING MACHINE 4"
& HEAD
162140



STAND FOR THREADING
MACHINE 4" MAF
162461



DIES FOR THREADING
MACHINE DIE HEADS
SET 4pcs
1"-2" 162003
2 1/2"-4" 162204



SET OF DIES INOX FOR
STEEL PIPE 4pcs BSPT
1/2"
137004



DROP HEAD
THREADERS NPT
1/2" 136352
1" 136354
1 1/2" 136356
1 1/4" 136355
2" 136357
1" 136354



DROP HEAD THREADERS
RIGHT BSPT
1/2" 136342 3/4" 136343
1" 136344 3/8" 136341
1 1/2" 136346
1 1/4" 136345
2" 136347



TUBE VICE
Etagriff®
13-90mm 162461
37-168mm 200230



STAINLESS STEEL PIPE
CUTTER 14-54 mm C54
210475



PIPE CUTTER 1/2-2"
210120



PIPE CUTTER INOX
6-67mm CT67
210483



PRESSURE PUMP
MANUAL 50Bar 10L
262015



RATCHET HOUSING FOR
MANUAL THREADER
1 1/2"-2" 136490
1/8"-1 1/4" 136290



PLIER WRENCH 10"-
250mm 45mm
011210



SWEDISH HYDRAULIC
TIPS 45°
1/2" 010521
1" 010534
1 1/2" 010549
2" 010560
3" 010590





|10-2392



|10-2000



|10-1050



|10-2150

WELDAS®



|10-1007



|10-1009



|10-1004



|10-2150

LEOPARD



|RG2010STD



|GG2025STD



|TG2035PRE



|TG2030STD



|W6160

ACTIVE GEAR®



|W6570



|10-2064XL

DRIVE

e-shop





| OXYGEN WELDING GLASSES



VUNIVET
OPTICAL TECHNOLOGIES
|5X4.03.30.05



|VISION V121



|IMEIAFU



|OCC000175

| GRINDING GLASSES



|OCC000127



|VISION V120



|IMEIAN



|DELTA PLUS



|VISION V100

| FACE SHIELDS - MASKS



|MEDMAXX



|CLEARMAXX



|BALB21N



|GALERVI

| EARPLUGS



|INTERLAGOS



|ICONICAP01



|ICONICDE010



|ICONICFIT01



|PROTECTION HELMETS



|CLIMAX



|ZIRCON



|DIAMOND V



|COLTAN

DELTA PLUS
YOUR SAFETY AT WORK

|PROTECTION MASKS AGAINST DUST - GAS - PARTICLES



|CLIMAX ABEK



|CLIMAX A1



|CLIMAX 731-C

3M



| 3M 6212M

**EMERGENCY
RESPIRATOR 10'
AIR M50**



ACTIVE GEAR

|REPLACEMENT FILTERS CLIMAX

89



|FFP2 AIR R20



|FFP3 AIR R30



|CARBON
V-414 FFP2

DELTA PLUS
YOUR SAFETY AT WORK



|M1100V FFP1

Roussakis



e-shop

www.roussakis.com.gr

DELTA PLUS
YOUR SAFETY AT WORK



|MCVES



|DMACHPAN



|M6GIL



|KNEE PADS
|MCSAL



|BELTS



|POLO SHIRT



|BALI



|ALASKA



|MCSAL



|REFLECTIVE VEST



|FLAME RETARDANT
- ANTISTATIC



|WATERPROOF

HEROCK
WEAR IT - WORK IT



|ANZAR



|OTHELLO



|ANUBIS



|HECTOR





WATERPROOF JACKET
L-3XL F440



REFLECTIVE VEST
M-4XL C496



REFLECTIVE STRIP
HV55



REFLECTIVE VEST
FLAME RESISTANT
M-5XL FR75



ANTI-MICROBIAL
SCARF CS25



SCARF FOR COLD
MULTIWAY
CS24



WATERPROOF CAP
B031



UNIFORM WITH STRAPS
SEALTEX S453



WELDERS' BOOTS S3
HRO 39-48
FW07



PROTECTION SYSTEM
PPE PW90



FACE SHIELD WITH
HEADBAND PW91



WATERPROOF
SUITCASE 70lt B910



TOOLBOX
OPENED TB02



EMERGENCY KIT
FA12



LACE FOR GLASSES
PA30

PORTWEST®

91

Roussakis



e-shop

www.roussakis.com.gr



WATERPROOF JACKET
FLAME RETARDANT
ANTISTATIC S773



FLAME
RETARDANT FLEECE
FR30



REFLECTIVE
PROTECTIVE CAP PW79



WHISTLE
120dB PA99



UNIFORM FLAME
RETARDANT FR28



UNIFORM FLAME
RETARDANT BIZFLAME
PRO FR28

PORTWEST®



RUBBER GLOVE
GAUNTLET A802



RUBBER GLOVE
LATEX 600mm A803





|JACKET 44-2530



|APRON 44-2142



|APRON WITH
SLEEVES 44-2847



|APRON 44-2836

WELDAS®
The Professional's Choice



|JACKET 44-7300



|BOLERO 44-2800



|SLEEVES 44-2321



|SPATS 44-2114



|HOOD 23-6680



|HOOD 23-6630



|HOOD 23-7766



|HOOD 23-7701



|HOOD 23-7733



|DOO-RAG 23-3611



|DOO-RAG 23-3602



|CAP 23-8000



e-shop

www.roussakis.com.gr



|JACKET 38-4330



|JACKET 38-4350



|APRON 38-4442



|SLEEVES 38-4321



94

|JUMPER
44-2648

WELDAS®
The Professional's Choice

|SCREENS




55-7166 1.74x1.74m



50-2368/2468 174x234cm
538 °C



50-1866 1.74x1.74m
1260 °C



BASE 55-8668



DELTA PLUS
YOUR SAFETY AT WORK



|BROOKLYN S3



|COBRA S3

ACTIVE GEAR®



|A-SPRINT S3 SRC



|A-FIRST S3 SRC

base



|MARATHON S3



|DEALER S1P



|IZAR TOP S3



|K-ROAD S3

helvi
WELDING MACHINES & BATTERY CHARGERS



|AGILE SAFE

PORTWEST



|WIRE LACE S1P
FT08



|RAIN BOOTS - CLOG

lotto
WORKS



|HIT 400 S1P



|SKATE S1P

gentle grip

Heat Holders

WORK FORCE

BLUE GUARD



|COVERS PVC



|INSOLES



|WORK SOCKS

www.roussakis.com.gr



e-shop



MICUEL
MIRANDA

FALL ARREST
HARNESS 5 POINTS
S72



KRATOS
SAFETY
SOLUTIONS FOR LIFE

FALL ARREST
HARNESS 2 POINTS
EN361 FA1010300



FALL ARREST
HARNESS 3 POINTS
WITH BELT FA1020300



FALL ARREST
HARNESS 3 POINTS
WITH BELT FA1020500



FALL ARREST LANYARD WITH
ABSORBER 1.5m D41T



FALL ARREST
HARNESS 3 POINTS
FLY'IN 1 FA1010101



HARNESS ROTATIVE
BELT 5 POINTS
L-XXL EN361 FA1020701



FALL ARREST
HARNESS 3 POINTS
FIRE FREE FA1021100



BELT FOR LINEMAN 5
POINTS S72



FOR ELECTRICIANS



2 STRAPS BELT 1.50m
WITH TENSIONER
FA3040215



FALL ARREST
HARNESS 3 POINTS
WITH VEST FA1030100



FALL ARREST
HARNESS 3 POINTS
WITH VEST FA1030200





SAFETY HELMET WITH
EVO® VISTAlens®
AMB170-005-F00



SAFETY HELMET-
WHEEL RATCHET
EVOLite® AJB170-000-100



SAFETY HELMET
VENTED WITH CLIP
EVO®3 AJF160-000-20



ΩΤΟΑΣΠΙΔΕΣ ΚΡΑΝΟΥΣ
Sonis®1 26dB SNR
AEB010-OCY-800



HELMET SHIELD
EVOGuard® C1
ADA240-060-000



HELMET SHIELD
EVOGuard® C4-MAX
ADA270-070-000



HALF-FACE MASK-
Force®8 WITH VALVE
Typhoon™
BHG003-2L5-000



FULL FACE MASK
Force®10 Typhoon™
BPB003-204-000



FILTER ABEK1 P3
PressToCheck™ 2pcs
BMN750-000-600



FILTER A2 P3
PressToCheck™ 2pcs
ADA270-070-000



DUST FILTER P3
PressToCheck™ 2pcs
BMN990-001-700



GILTER P3 Compact
PressToCheck™ 2pcs
BPB003-204-000



OVERSPECS
Stealth™ Coverlite™
ASA940-0A3-000



HELMET SPECS
EVOSpec® Evolution®
ANT120-200-000



SAFETY GOGGLES
EVO® DOUBLE LENS
AGM020-823-000



SAFETY SPECS
Forceflex™ 3000
ASA698-121-100





**SAFETY SPECS
SMOKE Forceflex™
3020 ASA698-125-800**



**WELDING GOGGLES
DIN 5 Profile
2PRONV23W5**



**SAFETY CAP WITH SORT
PEAK Hardcap
AAL000-002-100**



**CAP LIGHT
Hardcap LEDx5
AHV310-000-000**



**COMMS MOUNTED EAR
DEFENDER & BLUETOOTH
SONIS® AEB081-5C7-N00**



**COMMS MOUNTED EAR
DEFENDER SONIS®
AEB081-4C8-N00**



**COMMS HEADBAND EAR
DEFENDER &
BLUETOOTH SONIS®
COMMS AEB081-5A7-N00**



**COMMS HEADBAND EAR
DEFENDER
SONIS® COMMS
AEB081-4A8-N00**



**BROWGUARD SYSTEM
EVOGuard®
ADB280-000-400**



**PEEL OFF VISOR
PROTECTOR Force®10
10pcs
BPS050-000-000**



**CLEAR SAFETY SPECS
CORRECTIVE LENS +1.5 &
+3.0 Eyemax™
1EYE23C15**




**QUICK RELEASE 4 POINT
LINESMAN HARNESS
EN397 AHV200-000-000**



|BELTS - STRAPS - SAFETY ROPES



|SAFETY HOOPS

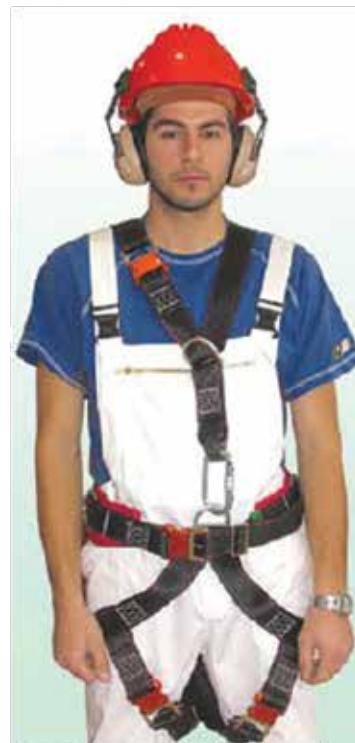

|FALL ARREST BELTS 3 & 5 ΣΗΜΕΙΩΝ

99



|SAFETY SIGNPOSTING



e-shop

www.roussakis.com.gr

Roussakis



GVS
FILTER TECHNOLOGY



FULLFACE MASK WITH 2
FILTERS ELIPSE INTEGRA® P3
SPR405IFUD-RA



REPLACEMENT MASK FILTERS
ELIPSE® P3
SPR336IDUD-RA



HALF FACE MASK WITH 2
FILTERS ELIPSE® P3
SPR502IFUC-RA



REPLACEMENT MASK GLASSES
INTEGRA SPM520 10pcs
SPM520ABEA



100

BLAST RESPIRATOR WITH
CONSTANT FLOW VALVE
NOVA 3
NV3-711-50



WELDING & GRINDING MASK
OPTREL HELIX
1050.200



PAPR SYSTEM FOR WELDING
HELMETS SWISS AIR
4700.010



AUTO DARKENING GLASSES ONYX 100% UV
1500.002

 **optrel**





OPTREL PANORAMAXX

5000.270 | Front cover lens



5000.010 | Inside cover lens



5004.020 | Back headgear sweatband



5004.073 | Sweatband



5003.263 | Head band



4028.015 | Chest protection leather



OPTREL PANORAMAXX CLT

5000.270 | Front cover lens



5000.010 | Inside cover lens



5003.291 | Headband IsoFit



4028.015 | Chest protection leather



OPTREL CRYSTAL 2.0

5000.212 | Front cover lens



5000.001 | Inside cover lens



5004.020 | Back headgear sweatband



5004.073 | Sweatband



5003.250 | Head band



4028.015 | Chest protection leather



OPTREL VEGAVIEW 2.5

5000.212 | Front cover lens



5000.001 | Inside cover lens



5004.020 | Back headgear sweatband



5004.073 | Sweatband



5003.250 | Head band



4028.015 | Chest protection leather



OPTREL E684



OPTREL p550

5000.270 | Front cover lens



5000.250 | Front cover lens



101

5000.010 | Inside cover lens



5000.001 | Inside cover lens



5004.020 | Back headgear sweatband



5004.020 | Back headgear sweatband



4028.015 | Chest protection leather



5004.073 | Sweatband



5003.250 | Head band



5003.250 | Head band



4028.015 | Chest protection leather



4028.015 | Chest protection leather



e-shop

www.roussakis.com.gr

ROUSSAKIS



OPTREL LITEFLIP

5000.391 | Front cover lens



5000.001 | Inside cover lens



5004.020 | Back headgear sweatband



5004.073 | Sweatband



5003.263 | Head band



4028.015 | Chest protection leather



OPTREL WELDCAP

5000.260 | Front cover lens



5000.040 | Inside cover lens



OPTREL LEATHER b530



OPTREL PAPR e3000 FILTER

4088.101 | External filter



4088.103 | Active carbon filter



4551.023 | Sealing kit



PANORAMAXX CLT & e3000
4550.590



PANORAMAXX & e3000
4500.550



CRYSTAL 2.0 & e3000
4530.050



**HELMET BACKPACK
OPTREL 8000.100**



**HELMET BACKPACK & e3000
8000.110**



**HEAD BAND IsoFit
5003.291**



**SHOULDER BELT FOR
PAPR e3000
4551.040**



**PARKING BUDDY
5002.900**



**MAGNIFIER LENS - OSE GLASS
5000.050 (+1.0) / 5000.051 (+1.5)
5000.052 (+2.0) / 5000.053 (+2.5)**



CLEARMAXX & e3000
4900.250





TEMPERATURE PROTECTION COAT
HSM130KA-1



PROTECTION JACKET FOR FOUNDRY
HSJ080KA-1-54



PROTECTION APRON FOR FOUNDRY
HSS1008KA-1



PROTECTION PANTS FOR FOUNDRY
HSH100KA-1-54



PROTECTION SPATS FOR FOUNDRY
HSG036KA-2-STK



PROTECTION SLEEVES FOR FOUNDRY
HSA042GKA-1



JUTEC PROTECTION HOOD NOMEX III
SH022020



PROTECTION GLOVES FOR FOUNDRY PBI®
H111B140-PBI



PROTECTION GLOVES FOR FOUNDRY 800°C
H05LA235-BL-11



PROTECTION GLOVES FOR FOUNDRY 1000°C
HSJ080KA-1-54



PROTECTION GLOVES FOR FOUNDRY 650°C
H125B236



PROTECTION GLOVES FOR FOUNDRY 900°C
HSH100KA-1-54



PROTECTION GLOVES FOR FOUNDRY SILICON 1100°C
H3110040



FIRE BLANKETS
1600x2000mm
JT5020FL



SPARK PROTECTION COVERS

Code	Temperature	Dimensions
S1352030	600°C	2000x3000mm
S4352030	1150°C	2000x3000mm
S5351830	1300°C	1800x3000mm



e-shop

www.roussakis.com.gr

| SIGNS OF OBLIGATION



ΥΠΟΧΡΕΩΤΙΚΗ ΠΡΟΣΤΑΣΙΑ ΤΩΝ ΜΑΤΙΩΝ



ΥΠΟΧΡΕΩΤΙΚΗ ΠΡΟΣΤΑΣΙΑ ΤΟΥ ΚΕΦΑΛΙΟΥ



ΥΠΟΧΡΕΩΤΙΚΗ ΠΡΟΣΤΑΣΙΑ ΤΟΝ ΑΥΤΙΩΝ



ΥΠΟΧΡΕΩΤΙΚΗ ΠΡΟΣΤΑΣΙΑ ΑΝΑΠΝΕΥΣΤΙΚΩΝ ΟΔΟΝ



ΥΠΟΧΡΕΩΤΙΚΗ ΠΡΟΣΤΑΣΙΑ ΤΩΝ ΠΟΔΙΩΝ



ΥΠΟΧΡΕΩΤΙΚΗ ΠΡΟΣΤΑΣΙΑ ΤΩΝ ΧΕΡΙΩΝ



ΥΠΟΧΡΕΩΤΙΚΗ ΠΡΟΣΤΑΣΙΑ ΤΟΥ ΣΩΜΑΤΟΣ



ΥΠΟΧΡΕΩΤΙΚΗ ΠΡΟΣΤΑΣΙΑ ΤΟΥ ΠΡΟΣΩΠΟΥ



ΥΠΟΧΡΕΩΤΙΚΗ ΑΤΟΜΙΚΗ ΠΡΟΣΤΑΣΙΑ ΕΝΑΝΤΙ ΠΤΩΣΕΩΝ



ΥΠΟΧΡΕΩΤΙΚΗ ΔΙΑΒΑΣΗ ΓΙΑ ΠΕζΟΥΣ



ΓΕΝΙΚΗ ΥΠΟΧΡΕΩΣΗ

| PROHIBITION SIGNS



ΑΠΑΓΟΡΕΥΕΤΑΙ ΤΟ ΚΑΠΝΙΣΜΑ



ΑΠΑΓΟΡΕΥΕΤΑΙ Η ΧΡΗΣΗ ΓΥΜΝΗΣ ΦΛΟΓΑΣ ΚΑΙ ΤΟ ΚΑΠΝΙΣΜΑ



ΑΠΑΓΟΡΕΥΕΤΑΙ Η ΔΙΕΛΕΥΣΗ ΠΕζΟΝ



ΜΗ ΠΟΣΙΜΟ ΝΕΡΟ



ΑΠΑΓΟΡΕΥΕΤΑΙ Η ΚΑΤΑΣΒΕΣΗ ΜΕ ΝΕΡΟ



ΜΗΝ ΑΓΓΙΖΕΤΕ



ΑΠΑΓΟΡΕΥΕΤΑΙ Η ΕΙΣΟΔΟΣ ΣΤΟΥΣ ΜΗ ΕΧΟΝΤΕΣ ΕΙΔΙΚΗ ΑΔΕΙΑ



ΑΠΑΓΟΡΕΥΕΤΑΙ Η ΔΙΕΛΕΥΣΗ ΣΤΑ ΟΧΗΜΑΤΑ ΔΙΑΚΙΝΗΣΗΣ ΦΟΡΤΙΩΝ

| SIGNS OF DANGER



ΕΥΦΑΙΚΕΣ ΥΑΛΕΣ/Η ΚΑΙ ΥΨΗΛΗ ΘΕΡΜΟΚΡΑΣΙΑ



ΕΚΡΗΚΤΙΚΕΣ ΥΑΛΕΣ



ΤΟΞΙΚΕΣ ΥΑΛΕΣ



ΔΙΑΒΡΩΤΙΚΕΣ ΥΑΛΕΣ



ΡΑΔΙΕΝΕΡΓΑ ΥΑΙΚΑ



ΑΙΔΡΟΥΜΕΝΑ ΦΟΡΤΙΑ



ΟΧΗΜΑΤΑ ΔΙΑΚΙΝΗΣΗΣ ΦΟΡΤΙΩΝ



ΚΙΝΔΥΝΟΣ ΗΛΕΚΤΡΟΠΑΗΝΕΙΑΣ



ΓΕΝΙΚΟΣ ΚΙΝΔΥΝΟΣ



ΑΚΤΙΝΟΒΟΛΙΑ ΛΕΙΖΕΡ



ΜΗ ΙΟΝΙΖΟΥΣΣΕΣ ΑΚΤΙΝΟΒΟΛΙΕΣ



ΒΙΟΛΟΓΙΚΟΣ ΚΙΝΔΥΝΟΣ



ΙΣΧΥΡΟ ΜΑΓΝΗΤΙΚΟ ΠΕΔΙΟ



ΧΑΜΗΛΗ ΘΕΡΜΟΚΡΑΣΙΑ



ΚΙΝΔΥΝΟΣ ΠΤΩΣΗΣ



ΠΥΡΟΣΒΕΣΤΙΚΗ ΜΑΝΙΚΑ



ΣΚΛΑ



ΠΥΡΟΣΒΕΣΤΗΡΑΣ ΤΗΛΕΦΩΝΟ ΓΙΑ ΤΗΝ ΚΑΤΑΠΟΛΕΜΗΣΗ ΠΥΡΚΑΓΙΩΝ



ΤΗΛΕΦΩΝΟ ΓΙΑ ΤΗΝ ΚΑΤΑΠΟΛΕΜΗΣΗ ΠΥΡΚΑΓΙΩΝ



ΠΥΡΟΣΒΕΣΤΙΚΟΣ ΕΞΟΠΛΙΣΜΟΣ ΚΑΤΩ



ΠΥΡΟΣΒΕΣΤΙΚΟΣ ΕΞΟΠΛΙΣΜΟΣ ΔΕΣΙΑ



ΠΥΡΟΣΒΕΣΤΙΚΟΣ ΕΞΟΠΛΙΣΜΟΣ ΑΡΙΣΤΕΡΑ




ΠΥΡΟΣΒΕΣΤΙΚΟΣ ΕΞΟΠΛΙΣΜΟΣ ΠΑΝΩ





EXPLOSION PROOF LIGHTS

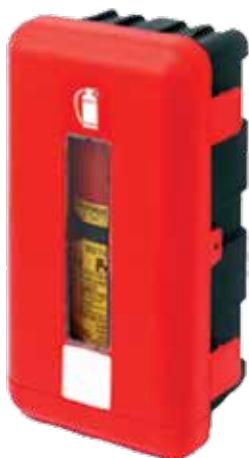

e-shop

www.roussakis.com.gr



60038800
ANGLE GRINDER WEV 10-125
Quick 1000 Watt



60046800
ANGLE GRINDER WEV 15-125
Quick 1550 Watt



606467260
ANGLE GRINDER W 24-230
MVT 2400 Watt



606475260
ANGLE GRINDER WE 26-230
MVT Quick 2600 Watt



600713500
MULTI HAMMER UHEV
2860-2 QUICK 1100W



600580000
POWER DRILL
BE 75-16 750 Watt



620002000
SCREWDRIVER USE 8
550 Watt



601100500
JIGSAW STE 100 Quick
710 Watt



606177500
SABRE SAW SSE 1100
1100 Watt

metabo[®]



600615000



600616000
DIE GRINDER GE 710 Plus
710 Watt



600615000
DIE GRINDER GE 710
COMPACT 710 Watt



600544000
CIRCULAR SAW KS 66 Plus
1400 Watt



619200000
BENCH GRINDER DS 200
600 Watt



600129000
ORBITAL SANDER SXE 450
TurboTec 350 Watt



602204000
IMPACT WRENCH
ELECTRIC SSW 650





447.552
ANGLE GRINDER
L 10-11 125



447.668
ANGLE GRINDER
LBE 17-11 125



391.522
ANGLE GRINDER
L 24-6 230



436.704
ANGLE GRINDER
L 26-6 230



270.067
DIE GRINDER
H 1127 VE



413.666
DRILL HAMMER
CHE 2-28 SDS-plus



468.029
DRILL HAMMER
CHE 4-32 R SDS-plus



365.920
DRILL HAMMER
DH 5 SDS-Max



487.961
SCREWDRIVER
PD 26 16.0 EC



459.690
PULSE SCREWDRIVER
ID 1/4" 18.0-EC



417.947
ANGLE GRINDER
L 125 18.0-EC



390.518
BAND SAW
SBG 4910



334.111
ORBITAL SANDER
XS 713



379.441
ORBITAL SANDER
ORE 150-3 350W



456.004
CROSS LEVEL
ALC 3/1-G



e-shop

www.roussakis.com.gr

9565CRX1



ANGLE GRINDER 125/115mm
1400W

9565CVRX2



ANGLE GRINDER
ADJUSTABLE 125/115mm 1400W

Makita



GA9030R

ANGLE GRINDER
2400W – 230 mm

GD0810C



DIE GRINDER
750 W – 8mm

GD0801C



DIE GRINDER
750 W – 8mm



M8100

DRILL HAMMER
710W – 16mm



AMGLE GRINDER
DWE4237 1400W



ANGLE GRINDER
DWE4257 1500W



ANGLE GRINDER
DWE 4559 2400W



DIE GRINDER
DWE 4884 450W



DIE GRINDER DWE 4997
1300W

DEWALT

Milwaukee



SET M18 FPP2D2-502X



RECIPROCATING SAW
M18 ONESX-502X



ANGLE GRINDER
M18 CAG125XPDB-502X



SET M18 ONEPP2A2-502X



IMPACT WRENCH
M18 ONEFHIWF12-502X

BOSCH

STANLEY

STAYER

AEG
POWER TOOLS

BLACK+DECKER

108



FF GROUP®
QUALITY POWER TOOLS



| SCREWDRIVER BATTERY
CDD 12V PLUS



| SCREWDRIVER BATTERY
CDD/35 20V PLUS



| DRILL HAMMER
ID 550 PLUS



| DRILL HAMMER
FH 2-26 PLUS



| ANGLE GRINDER
AG 125/1400C HD



| ANGLE GRINDER
AG 230/2600S HD



| RECIPROCATING SAW
RS 1050 E PLUS



| DIE GRINDER
DG 500 PLUS



| BLOWER
ABSORBER
AB-600 EASY



| WELDING MACHINE
INVERTER DWM 160 PLUS



| WELDING MACHINE
INVERTER DWM 200 PRO



| BENCH GRINDER
DBG 200 PRO



e-shop

www.roussakis.com.gr



| CRANE SCALE
OCS-A/B

TOYO



| LEVER HOIST VT 5m

1 - 5T



| VERTICAL LIFTING
CLAMP CD

0.5 - 8T



| CHAIN LEVER HOIST
VA 1.5m

0.5 - 6T



| HOIST EELCTRIC
TROLLEY HHBB

1 - 3T

| CHAIN ELECTRIC
HOIST HHBB 5m

1 - 3T



| BEAM CLAMPS JG

1 - 5T



| MECHANICAL LIFTING
JACK KD

1.5 - 20T



| PALLET TRUCK 2.5T



| WIRE ROPE LEVER
HOIST 20m JHSS

1.6 - 3.2T



| PIPE HOOK PHT

1 - 5T



| HORIZONTAL LIFTING
CLAMP LC

1 - 3T



| LIFTING JACK
AGATU



| CARGO TROLLEY

| HYDRAULIC PUMPS



MANUAL



ELECTRIC



FPY SERIES



RSC SERIES



PR SERIES

| HYDRAULIC LEVER
CYLINDER JACK
10 - 100T





| LIFTING MAGNET
PML



| LIFTING MAGNET
LTF 220




| LIFTING MAGNET
LTF 185




| MAGNETIC METAL
SEPARATOR
LTF SEP-MAG

TOYO

LTF®

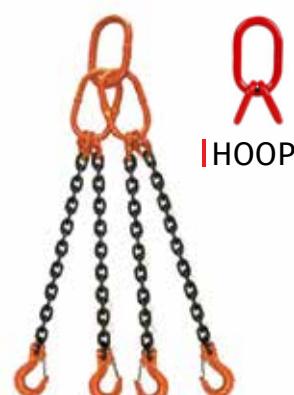

| ISLING WITH 4 & 2 CLONES

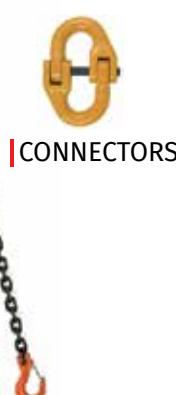

| CONNECTORS



| CIRCULAR HOIST FOR
SCRAP METAL LTF HTR



| ELECTRO-PERMANENT
MAGNETIC LIFT
LTF SQ-LIFT



150mm



120mm



90mm



60mm



50mm



| BINDING BELT WITH
BOLLARD 6M & 9M

| BELT RATCHET



Nominal carrying capacity for each basic configuration	Colour of sewn webbing component	WLL = Working load limit									
		Straight lift		Choked lift		Basket hitch		Basket hitch		2-leg sling	
		100%	WLL kg	80%	WLL kg	100%	WLL kg	140%	WLL kg	140%	WLL kg
1000	Violet	1000	800	2000	1400	1800	1400	140%	1000	1200	1500
2000	Green	2000	1600	4000	2800	3800	2800	200%	2000	2400	3000
3000	Yellow	3000	2400	6000	4200	5000	4200	3000	3000	3600	4500
4000	Grey	4000	3200	8000	5600	6000	5600	3600	3600	4000	5000
5000	Red	5000	4000	10000	7200	8000	7200	5000	5000	5800	7500
6000	Brown	6000	4800	12000	8400	9600	8400	6000	6000	6800	8500
8000	Blue	8000	6400	16000	11200	14000	11200	8000	8000	10000	13000
10000	Orange	10000	8000	20000	14000	18000	14000	10000	10000	12000	15000
Over 10000	Orange										

111



CARGO LIFTING HOOKS 1T-10T



MARINE SHACKLES & SWIVELS



e-shop

www.roussakis.com.gr

ROUSSAKIS

Magnetic squares & clamps STRONG HAND TOOLS

Strong Hand Tools

MLD600



MLA450 | 12kg
MLA600 | 15kg



MS45 | 10kg
MS60 | 25kg



| INSIDE/OUTSIDE 90°

| INSIDE/OUTSIDE 30°-270°

| STANDARD 30°, 60°, 90°

| MST327

MSA45 | 30kg
MSA47 | 35kg



MSA46-HD | 40kg
MSA53-HD | 65kg
MSA48-HD | 75kg



MS2-80 | 55kg
MS2-90 | 120kg



MS2-300



| ADJUST-O ON/OFF

| ADJUST-O HD ON/OFF

| ADJUST-O / 2 SWITCHES

| A-FRAME HD



| ADJUST-O MAV120



| CLAMP 38-64mm



| CLAMP C-CLAMP



| CLAMP 25-50mm

PG114V



| CLAMP 50-80mm



| WELDING CLAMP
PSB SERIES

PUP90-100



| CLAMP U-PRONG

PDB80



| CLAMP DUCK BEAK

112



PL634

| ANGLE CLAMP
PL JointMaster™



PVS100

| PIPE CLAMP ECONOMY 3"



WAV200

| DOUBLE WELDING VICE
WAS200



AGH130P

| MAGNET GRASSHOPPER





ADJUSTABLE SPINDLE CLAMP MagVise



2 AXIS VIXTURE VICE WAC22

Strong Hand Tools



PIHER



- 04020 | 12x20cm
- 04030 | 12x30cm
- 04040 | 12x40cm
- 04050 | 12x50cm
- 04060 | 12x60cm
- 04080 | 12x80cm
- 04100 | 12x100cm

| F SERIES



- 05020 | 15x20cm
- 05030 | 15x30cm
- 05040 | 15x40cm
- 05050 | 15x50cm
- 05060 | 15x60cm
- 05080 | 15x80cm
- 05100 | 15x100cm
- 05150 | 15x150cm
- 05200 | 15x200cm

| R SERIES



- 15030 | 22x30cm
- 15040 | 22x40cm
- 15060 | 22x60cm
- 15080 | 22x80cm

| S SERIES



- 05020 | 30x40cm
- 05030 | 30x50cm
- 05040 | 30x60cm

| K SERIES



- 12030 | 19x30cm
- 12040 | 19x40cm
- 12050 | 19x50cm
- 12060 | 19x60cm
- 12080 | 19x80cm
- 12100 | 19x100cm
- 12150 | 19x150cm
- 12200 | 19x200cm

| XXL SERIES



| MM SERIES

- 02012 | 7x12cm
- 02015 | 7x15cm
- 02020 | 7x20cm
- 02025 | 7x25cm
- 02030 | 7x30cm

113

ROUSSAKIS



e-shop

www.roussakis.com.gr



PISTON CARRIERS AIR COMPRESSORS

SINGLEPHASE | from 3hp - 50lt
to 3hp - 200lt
TRIPLEPHASE | from 3hp - 90lt
to 10hp - 500lt



SILENT AIR COMPRESSORS

from 3hp - 200lt
to 10hp - 1000lt



Cylinder Jacks from 2ton - 20ton



PAINTING GUN upper container

Container capacity: 1000cc
Nozzle: 1.5 - 1.8 - 2.0



PAINTING GUN bottom container

Container capacity: 1000cc
Nozzle: 1.5 - 1.8 - 2.0 - 2.5



CHARGERS BATTERY STARTERS

Charging voltage: 12/24V
Power: 1100 - 1500 Watt
Battery charging:
450Ah - 750Ah



AIR SCREWDRIVER 1/2

Axis: 1/2
Torque: 53kg - 183kg
Average consumption:
113lt/min - 150lt/min

AIR GRINDER FLEXIBLE

22000 rpm
Air consumption: 150lt/min
Operating pressure: 6 bar

AIR RIVETERS

Nozzle: 2.4 - 3.2 - 4 - 4.8
Air consumption: 150lt/min
Operating pressure: 1-7 bar





CONCRETE CUTTER
27423



LONG NOSE PLIERS
27716



BENT LONG NOSE
PLIERS 27718



SIDE CUTTER
27714



PLIERS WITH FULCRUM
27709



ADJUSTABLE WRENCH
14299/14300/14301



ELECTRICIAN LONG
NOSE PLIERS 77563



ELECTRICIAN LONG
NOSE PLIERS 38197



ELECTRICIAN PLIERS
70725



ELECTRICIAN CUTTER
77553



STRAIGHT CIRCLIP
PLIERS 71119



BENT CIRCLIP PLIERS
71129



SEMIROUNDED FILE
WITH HANDLE 14780



ROUNDED FILE WITH
HANDLE 14794



FLAT CONCRETE
PUNCH 23020/21/22/23



CONCRETE PUNCH
23025



CONCRETE PUNCH
23026



FLAT CHISEL
23017/23018



ALUMINUM HACKSAW
70042



HACKSAW
70043



HACKSAW
14317



DEAD BLOW HAMMER
40073 (908gr) / 40074
(1362gr) / 40075 (1816gr)



STONE HAMMER
WITH HANDLE
FIBERGLASS
14392 (1kg) / 14394
(1.5kg) / 39221 (2kg)



SLEDGE HAMMER
77276 (3kg) / 77277
(4kg) / 77278 (5kg) /
77279 (6kg) / 77280 (8kg)



CHALK THREAD
38181



e-shop

www.roussakis.com.gr



SLOGGING RING WRENCH
70359 (24mm - 85mm)



END WRENCH
70153 (6mm - 80mm)



COMBINATION WRENCH
70110 (6mm - 80mm)



2 WAY GEAR WRENCH
70691



COMBINATION WRENCH SET 70146



END WRENCH SET
36240



SCREWDRIVERS SET
32897



STRAIGHT SCREWDRIVER
32867



LONG HEX KEY SET
34759



LONG TORX HEX KEY SET 77553



LEVEL WITH 2 VIALS
L12 70601/2/3



LEVEL WITH 3 VIALS
L12 70605/8/9



MEASURING TAPE
38264 (5mX19mm)
38265 (5mX25mm)
38266 (7,5mX25mm)
39954 (10mX25mm)



MEASURING TAPE
TYLON
0-30-687 (3mX13mm)
0-30-697 (5mX19mm)



METPO KDS
25-55 (5mX25mm)
25-75 (7,5mX25mm)



WOODEN METER
12431



MEASURING TAPE
30m STANLEY
0-34-108



MEASURING TAPE
20m STANLEY
0-34-105



3 BLADE CUTTER
18mm 74245



3 BLADE CUTTER
18mm 23141



CUTTER WITH BROKEN BLADE
18mm 0-10-421
& 25mm 0-10-425



CUTTER SPARE PARTS
71079/80



HAND BRASS BRUSH
74359



HAND BRASS BRUSH INOX
18001



HAND BRUSH 5 ROWS
614-048129





PADLOCK HUGO SB
2 KEYS:
60214/5/6/7/8/9
(30mm-60mm)
3 KEYS: 60296(70mm)



SHUTTER LOCK BR
60142 (63mm)
60143 (76mm)
60053 (85mm)



PADLOCK HUGO BR L
60139 (40mm)
60140 (50mm)



RIVETER
BENMAN 70099



RIVETER
F.F. GROUP 14810



ALUMINUM RIVETS
36240



CUP SUCTION LIFTER
70303 (single)
70304 (double)



WRECKING BAR
23138 (600mm)
23139 (800mm)
151-005964 (1m)



HEADLIGHT TRIPOD
23033



HEADLIGHT LED
45273



WORK LAMP
LED 39918



WORK LAMP
172-12001



CABLE EXTENSION
REEL
172-22333 (33m)
172-22350 (50m)



BOLT CUTTER
19291/2/3/4/5
(12", 14", 18", 24", 30")



BOLT CUTTER
70054/5/6
(14", 18", 24")



CABLE TIES BLACK
70788



CABLE TIES WHITE
70774



CABLE TIES INOX
70881



INSULATING TAPES
10756 (κόκκινο)
13753 (κίτρινο)
13757 (λευκό)
13758 (μαύρο)



PACKAGING TAPE
BROWN 38576



PACKAGING TAPE
TRANSPARENT 38574



PAPER TAPE
26063 (50mmX45m)
26061 (30mmX45m)



PAPER TAPE
35224



ALUMINUM TAPE
26044 (50x10m)
26045 (50x50m)



PAPER TAPE BLUE
317-26056 (30x45mm)
317-26058 (50x45mm)



Hand tools - Non sparking hand tools



| FABRIC TAPE
33479 (50mmX50m)



| FABRIC TAPE
39923 (48mmX20m)



| STRETCH FILM BLACK
581-10101502



| STRETCH FILM
TRANSPARENT
581-10101302



| ROTATING WHEEL
502.000.001.100



| HEAVY DUTY ROTATING
WHEEL
502.000.016.125



| HEAVY DUTY ROTATING
WHEEL RED
502.000.026.125



| NYLON ROTATING
WHEEL WITH BREAK
502.000.021.100



| STRAIGHT ANGLE
113-GVIS100/150/200
/250/300/400/500/600
800



| ANGLE WITH RABBET
113-GVPA100/150/200
/250/300/400/500/600
800




| NON SPARKING STONE
HAMMER 3400008860



| NON SPARKING
COMPINATION
WRENCH 440.17SR



| NON SPARKING SHOVEL
NS8400A

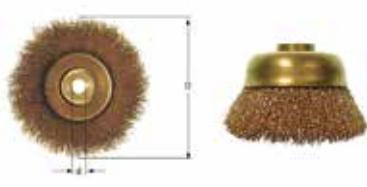

| NON SPARKING BRUSH CUP
KC0076




| NON SPARKING
WRENCH
3400007670



| NON SPARKING
WRENCH
963.7724



| NON SPARKING CROSS PEEN
HAMMER FS1000A



| NON SPARKING STONE HAMMER
FG0323A



| NON SPARKING HOOK SPANNER
CV2000A



| NON SPARKING STRIKING BOX
WRENCH AH0027A



| DRILL HSS 1-20



| NON SPARKING LEVER HOIST



| NON SPARKING COMPINATION WRENCH
AA0013A - AA0032A



KÄRCHER



HIGH PRESSURE MACHINE
K4 FULL CONTROL
1.324-000.0



WATER FILTER VACUUM
CLEANER DS 6
1.195-220.0



VACUUM CLEANER NT 35/1
TACT
1.184-850.0



MANUAL SWEEPER
KM 70/20 C 1.517-106.0



MACHINE
PROTECTOR RM 110
6.295-627.0



OIL & GREASE
CLEANER
RM 31 - 25 - 81
6.295-584.0



SAFETY GLASSES
CLEAR VISION
V120



SAFETY GLASSES
WITH STRAP
V310

ACTIVE GEAR



SINGLE USE COVERALL
X569 - X530 - X550 (paint)



SINGLE USE
COVERALL
X590



CHEST BOOTS -
PANTS PVC
101703901



SINGLE USE CAP
11-35-38



SHOES COVERS
SURCHPLUS



GALOSH PVC
02.30141



SAFETY GALOSH
PVC
02.30142/SAF



FFP2 AIR R20



FFP3 AIR R30



CARBON
V-414 FFP2



SINGLE USE MEDICAL
MASK SOFTCARE
121.011.B.6



SINGLE USE MASK
SOFTCARE FFP2
121.015.3.W.6




e-shop

www.roussakis.com.gr

119

Roussakis

Cleaning equipment



KITCHEN ROLL
ECONOMY 80m
1408000050



KITCHEN ROLL
BIG 100m
1408000049



KITCHEN ROLL
GIGA 2X28m
1408000049



LAUNDRY TABLETS
BRILLIANT
2999230101



DISH WASHER
750ml 1200750222



DISH SPONGE
2999160101



HYGIENE ROLLS 2PLY
1408000049



HYGIENE ROLLS 3PLY
2999230101



HYGIENE ROLLS 4PLY
2999230101



SURFACE
CLEANER
2lt 1200260113



SURFACE
CLEANER 1lt
1200260113



CLEANER WITH
CHLORINE 2lt
1200260600




GLASS LIQUID
CRYSTAL CLEAR
1200260113

120



FABRIC SOFTENER
1200150413



WASHING
POWDER
2999020216



LIQUID LAUNDRY
DETERGENT
1200430814



COLOR CATCHER
299902050



LIQUID LAUNDRY
FOR BLACK FABRIC
1200150810





PROFESSIONAL
ROLL JUMBO 5kg
1100610201

FLOOR BASE FOR
ROLL
576-ΣΧ21



CREAM SOAPS
1200300704

TISSUES
1100440003



HAND TOWEL DEVICE
AUTOCUT
999150414

HYGIENE ROLL
DEVICE
2999150403

LIQUID FOAM SOAP
DEVICE
2999150415



HAND TOWEL FOR DEVICE
6 ROLLS
1100640614



WC BLOCK
2999170103



PRESSURE SPRAYER
2-6-8 LITERS
317-77128/129/130

BACKPACK
SPRAYER 12 LITERS
317-77131



MULTICLEANER
SUPER ENERGY 4lt
392-000042



MULTICLEANER
SUPER ENERGY 750ml
392-002465



CREAM WASH HAND
HADISON-E
332-100358 / 4lt



TRASH CART
317-74993



WHEEL BUCKET
- PIN
813-09-11



BRUSH SCREW
BEND
011-10-00



ROAD WIRE BRUSH
317-26886



ASPHALT BRUSH
45cm 1200260113



GRASS SWEEPER
813-09-11

121

Roussakis



e-shop

www.roussakis.com.gr

Cleaning equipment - Garden equipment - Paint shop equipment



MOP TOWEL
048-30-11



MOP MICROFIBER
813-16-11



WOODEN STICK
WITH SCREW
130-79-11



PLASTIC BIN 60lt WITH
LID PUSH & ASHTRAY
576-KP60X



RECYCLE BIN ME
PEDAL & WHEELS
427-44433030



METALLIC FUEL TANK
10/20lt
11231/20L



PLASTIC FUEL TANK
10lt
21133/10L



WOODEN HANDLES
FOR SHOVEL, HOE,
etc. 317-70859



CURVED SHOVEL
BENMAN
317-70203



AX WITH PLASTIC
HANDLE
317-77446



FORGED HOE
BENMAN
317-77265



SICKLE CUTTER
317-77248



FORK BENMAN 317-
77236



RAKE WITH 14
TEETH BENMAN
317-77241



AX WITH WOODEN
HANDLE 317-77233



ADJUSTABLE
GARDEN GUN
317-77197



FLOOR ASHTRAY
3636



PRUNER WITH SOLID
HANDLE
317-77105



PRIMER FOR METAL
SURFACES
429-VEC32601



METALS PRIMER IN
SPRAY RED, GRAY,
WHITE 317-77446



SEALING ADHESIVE
SOUDAFLEx 40FC
WHITE, GREY, BLACK
317-21808



SILICONE SOUDAL
WHITE, GREY
317-24113



SILICONE
TRANSPARENT
317-15598
WHITE 317-15600



SILICONE ANTI-
MOLD BLACK
317-20156
WHITE 317-20155



SILICONE ADHESIVE-
SOUDAFLEx 40FC GREY
317-21809 WHITE 317-20171

122

ROUSSAKIS





HYBRID POLYMER
INSTANT SEALANT
SOUDAL FIX ALL
317-20183



SEALANT/ADHESIVE
SOUDAL FIX ALL
CRYSTAL
317-20875



HEAVY DUTY
SILICONE GUN
317-14155



SILICONE GUN
310ml 317-70100



SILICONE GUN
600ml 317-70148



ACRYLIC STUCCO
SOUDAL ACRYRUB
280ml - GREY 317-20174
WHITE 317-20173



SILICONE RED
GASKET MAKER RED
PERMATEX
PMX-814090312



SILICONE ADHESIVE
POLYMAX 425gr
BISON
8710439188775



ACRYLIC UNIVERSAL
WHITE BISON 425gr
8710439056203



POLYESTER BODY
FILLER POLYSOFT
380gr 317-36942



GASOLINE GLUE NEO-
STICK 550 OY-755005



NYLON COVERS
20m² 317-10153



PAINTBRUSH WHITE
A15 MORRIS 1 1/2"-3"
317-16718



SHAFT PAINTBRUSH
MORRIS 2"-3"
317-24967



SPATULA WITH WOODEN
HANDLE 20-60mm
317-70803



SHAFT SCRAPER
BENMAN 317-74238



GLASS SCRAPER
FLEXIBLE FF GROUP
317-10496



TROWEL BENMAN
317-70531



SPATULA WITH
PLASTIC HANDLE
317-70597



CONCRETE BLENDER
M14 BENMAN
317-71792



NYLON BRUSH
317-27157



CEILING BRUSH
317-27150



PAINT ROLL GREY/
BLACK BENMAN
317-71227



PAINT ROLL PVC
MORRIS 317-18885



PLASTIC ROLL TUB
24cm
317-13357



STANLEY



METAL TOOLBOX WITHOUT
DRAWERS STST1-75508



METAL TOOLBOX WITH
DRAWERS STST1-75510



TOOL BAG WITH WHEELS
20" 1-97-515



OPEN ACCESS TOOL BAG
16" 1-96-183



TOLLBOX STANLEY
2000 SERIES
31,8 x 17,8 x 13 1-92-064
41,1 x 19,9 x 18,5 1-92-065
48,9 x 26 x 24,8 1-92-066
61 x 27 x 28,4 1-92-067




TOOL BOX WITH
TRANSPARENT LID 19"
1-97-515



TOOL CARRY BACKPACK
STST1-72335

TOOLBOX FATMAX
MST1-75779

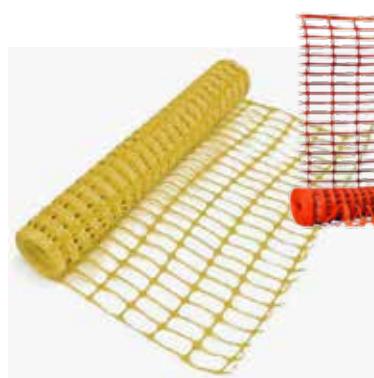

PROTECTION GRID ROLL



COVER SHEETS TRANSPARENT
ROLL




CARGO PROTECTION GRID
ROLL





Papandreou & Fanarioton - Aspropyrgos Attiki

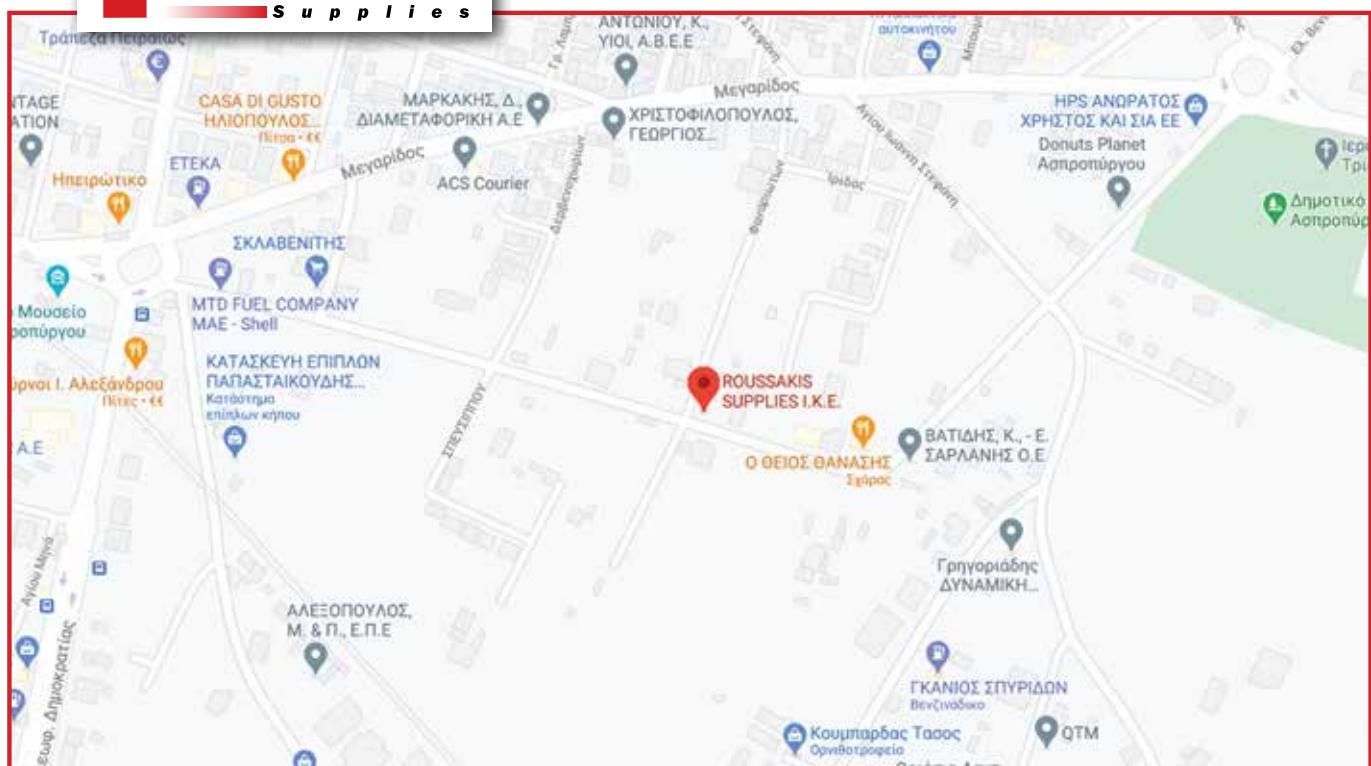

Agiou Georgiou St. - Aspropyrgos Attiki

