

Max. load



Precision scaling




Protective
countersink



Leg sleeve

3D welding tables from DEMMELE[®]. Well-equipped.



Worktop with D22
system bores in
a 100 x 100 mm
diagonal grid


The all-rounder.

DEMMELE[®] 3D welding tables D22 PROFIPlusLINE (PL)

3D welding table D22 PROFIPlusLINE (PP)

D22

- Worktop with D22 system bores in a 100 x 100 mm diagonal grid
- Two-row bore pattern on the table side plates with D22 system bores in a 50 mm grid
- Table sizes optionally available in a hardened version – DEMONT 760 M
- All system bores with protective countersink, perfect design and ultimate functionality
- Optimised outside table edges
- Improved table reinforcement through additional cross-ribs
- Continuous grid lines in X and Y directions, spaced 100 mm apart
- Precision scaling with millimetre division, including with the DEMONT 760 M option
- Coordinate marking of the bores in the X and Y directions
- DEMMELE logo recessed in all four side plates
- Table legs with precision adjustment, round design with pivoting leg
- Leg sleeve to protect the tube assembly
- Special dimensions and optional drilling patterns (e.g. M16, M20, M24) possible on request
- The table is also available in a stainless steel version on request

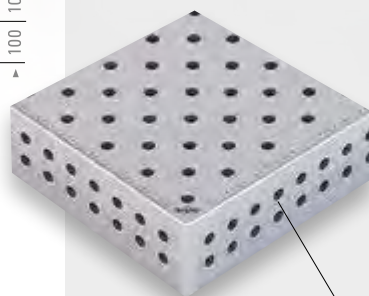

Two-row bore pattern on the table side plates with D22 system bores
in a 50 mm grid



The table sizes. With or without standard table legs.

3D welding table D22 PROFIPlusLINE (PL) – without standard table legs



					D22	
					SOLID	Hardened DEMONT 760 M
L x W in mm	H in mm	Approx. weight in kg	Max. load in kg	Number of legs	Item no.	Item no.
1000 x 1000	150	210	–	No legs	PL22-01001-000	PL22-01001-500
2000 x 1000	150	375	–	No legs	PL22-01002-000	PL22-01002-500
2400 x 1200	150	535	–	No legs	PL22-01003-000	PL22-01003-500
3000 x 1500	150	785	–	No legs	PL22-01004-000	PL22-01004-500

3D welding table D22 PROFIPlusLINE (PL) – with standard table legs



					D22	
					SOLID	Hardened DEMONT 760 M
L x W in mm	H in mm*	Approx. weight in kg	Max. load in kg	Number of legs	Item no.	Item no.
1000 x 1000	850 ±30	244	12000	4	PL22-01001-001	PL22-01001-011
2000 x 1000	850 ±30	409	12000	4	PL22-01002-001	PL22-01002-011
2400 x 1200	850 ±30	569	12000	4	PL22-01003-001	PL22-01003-011
3000 x 1500	850 ±30	836	18000	6	PL22-01004-001	PL22-01004-011

*The length of the standard table legs in the basic configuration is 700 mm ±30 mm.
The standard table legs are also available in a length of 800 mm ±30 mm, see page 45.

Different leg versions are possible for this system size D22



For more information and an overview of the
table leg versions, see page 45 onwards

You can also find
out about the leg
versions online.

